
# CHOPOK L 50 LD 500/450,510,570


Range 50

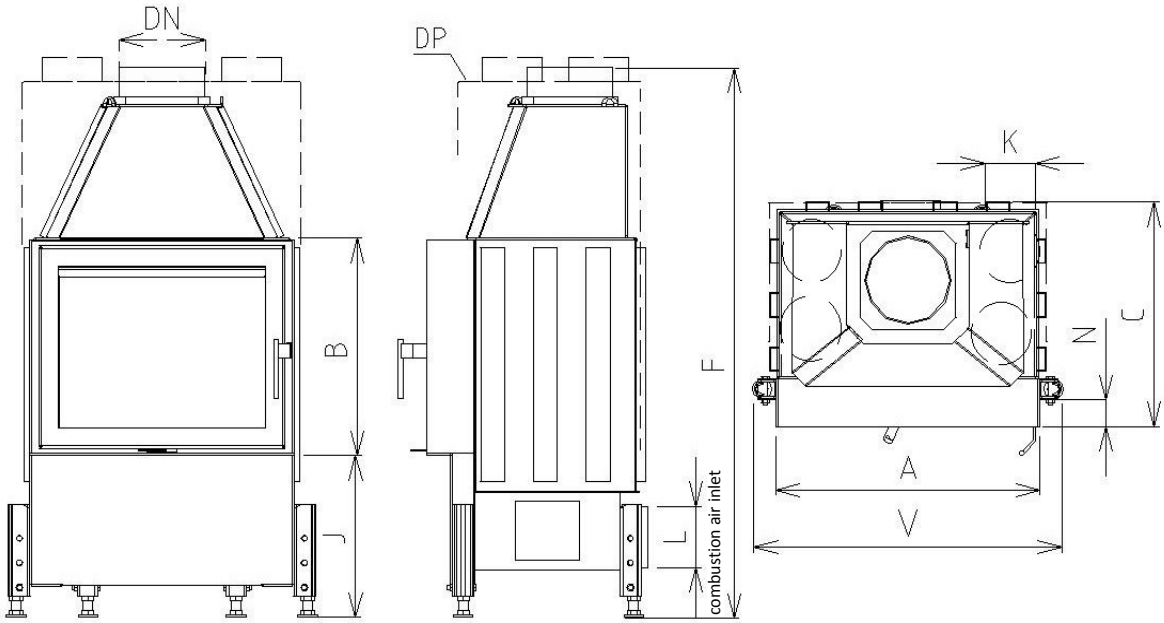


| | Sizes | | CHOPOK L 50 LD 500/450 | CHOPOK L 50 LD 500/510 | CHOPOK L 50 LD 500/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 500 | | |
| 2 | F | mm | 1100 | 1160 | 1230 |
| 3 | C | mm | 465 | | |
| 4 | DN | Ø mm | 160 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 610 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 2x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet (EPV)
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Coated with ecological paint

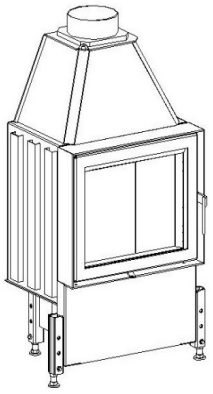

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 7,5 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 77,6 |
| 4 | Average flue gas temperature | | °C | 262 |
| 5 | Wood consuption | | kg/h | 2,7 |
| 6 | Consumption of combustion air | | $m^3/h$ | 23 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 8,1 |
| 9 | Weight | | kg | 170 |
| 10 | Required min. cross section for circulating air - INPUT | | $cm^2$ | 225 |
| 11 | Required min. cross section for circulating air - OUTPUT | | $cm^2$ | 375 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 160 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |


**Optional accessories:**

Cover frame (KR) - divided
Glass Reflex (SR)
Black printed glass(SM)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant(APO)

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 55 LD 550/450,510,570


Range 55

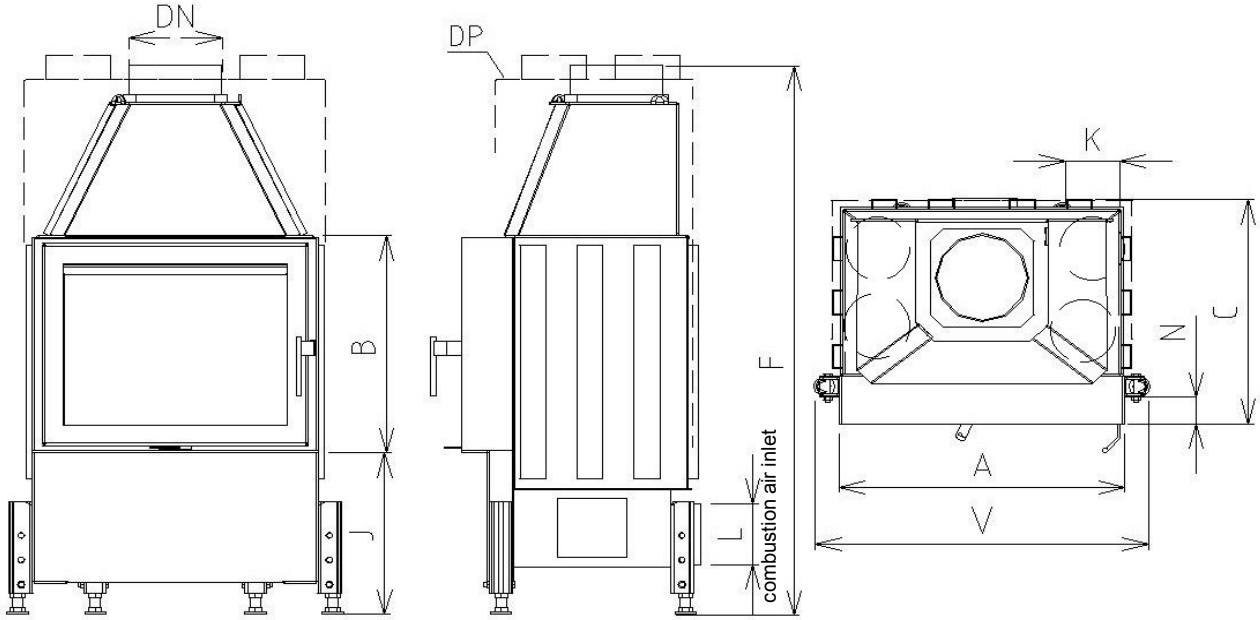


| | Sizes | | CHOPOK L 55 LD 550/450 | CHOPOK L 55 LD 550/510 | CHOPOK L 55 LD 550/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 550 | | |
| 2 | F | mm | 1130 | 1190 | 1250 |
| 3 | C | mm | 465 | | |
| 4 | DN | Ø mm | 180 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 660 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

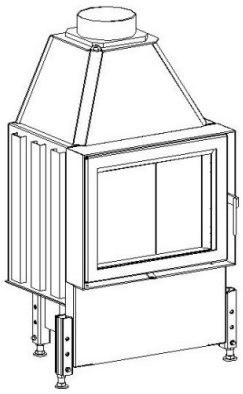

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 8,0 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 78 |
| 4 | Average flue gas temperature | | °C | 263 |
| 5 | Wood consuption | | kg/h | 2,9 |
| 6 | Consumption of combustion air | | $m^3$/hod | 24 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 8,8 |
| 9 | Weight | | kg | 190 |
| 10 | Required min. cross section for circulating air - INPUT | | $cm^2$ | 250 |
| 11 | Required min. cross section for circulating air - OUTPUT | | $cm^2$ | 400 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 160 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

**Optional accessories:**

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 60 LD 600/450,510,570


Range 60

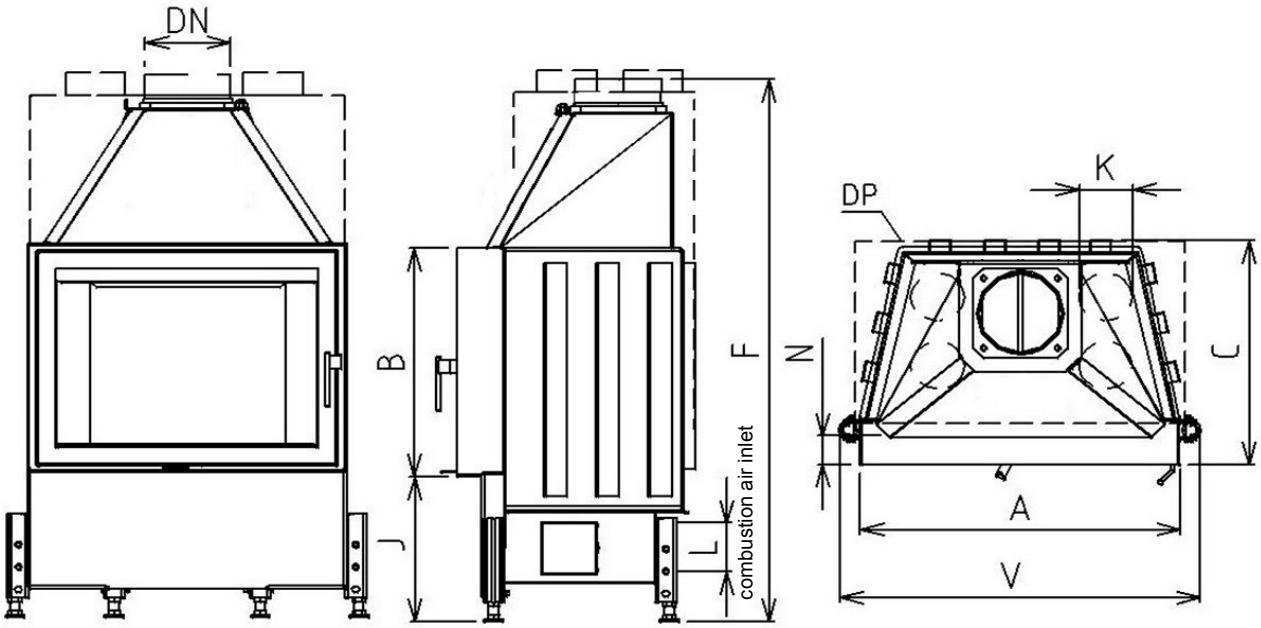


| | Sizes | | CHOPOK L 60 LD 600/450 | CHOPOK L 60 LD 600/510 | CHOPOK L 60 LD 600/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 600 | | |
| 2 | F | mm | 1150 | 1210 | 1270 |
| 3 | C | mm | 505 | | |
| 4 | DN | Ø mm | 180 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 710 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

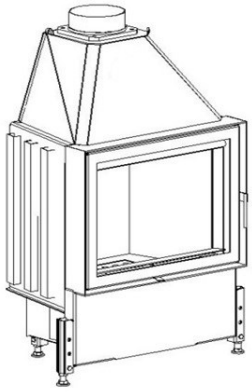

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 9,0 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 78 |
| 4 | Average flue gas temperature | | °C | 264 |
| 5 | Wood consuption | | kg/h | 3 |
| 6 | Consumption of combustion air | | m 3/hod | 27 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 9,2 |
| 9 | Weight | | kg | 195 |
| 10 | Required min. cross section for circulating air - INPUT | | cm 2 | 275 |
| 11 | Required min. cross section for circulating air - OUTPUT | | cm 2 | 450 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 160 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

**Optional accessories:**

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 67 LD 670/450,510,570


Range 67

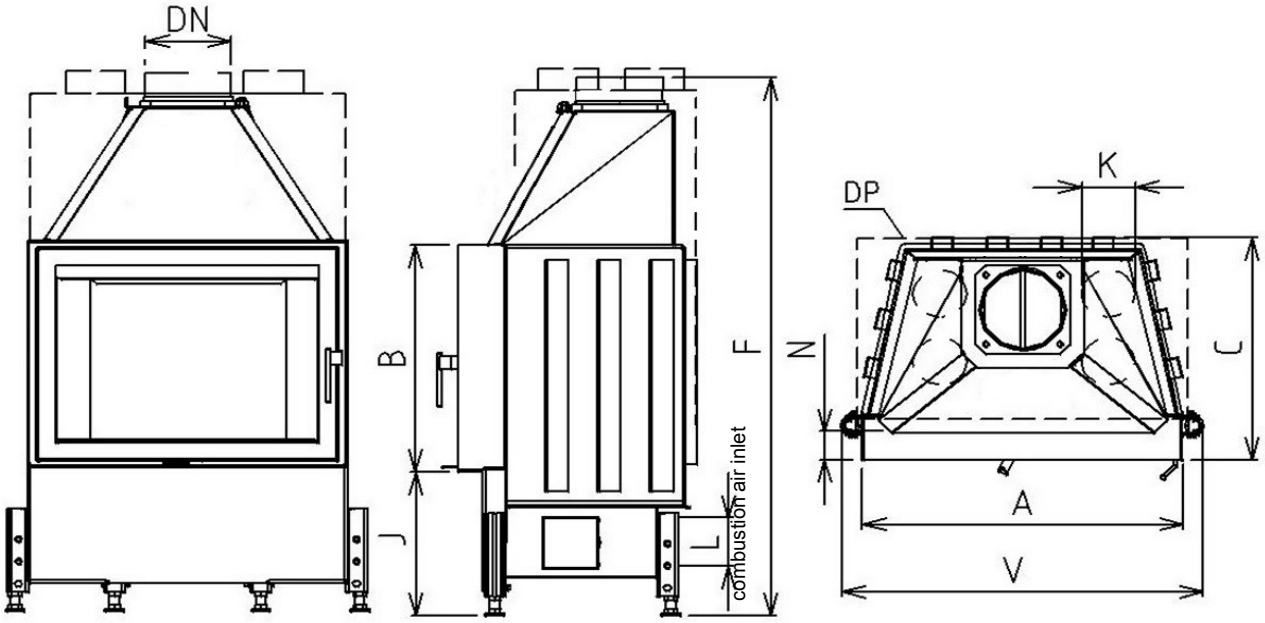


| | Sizes | | CHOPOK L 67 LD 670/450 | CHOPOK L 67 LD 670/510 | CHOPOK L 67 LD 670/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 670 | | |
| 2 | F | mm | 1150 | 1210 | 1270 |
| 3 | C | mm | 505 | | |
| 4 | DN | Ø mm | 180 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 780 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

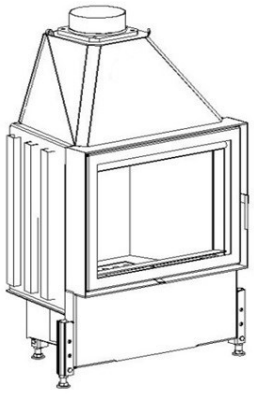

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 10,0 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 77,9 |
| 4 | Average flue gas temperature | | °C | 265 |
| 5 | Wood consuption | | kg/h | 3,2 |
| 6 | Consumption of combustion air | | m 3/hod | 30 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 10 |
| 9 | Weight | | kg | 210 |
| 10 | Required min. cross section for circulating air - INPUT | | cm 2 | 300 |
| 11 | Required min. cross section for circulating air - OUTPUT | | cm 2 | 500 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 180 |
| 13 | Character of building const- ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

**Optional accessories:**

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 73 LD 730/450,510,570


Range 73

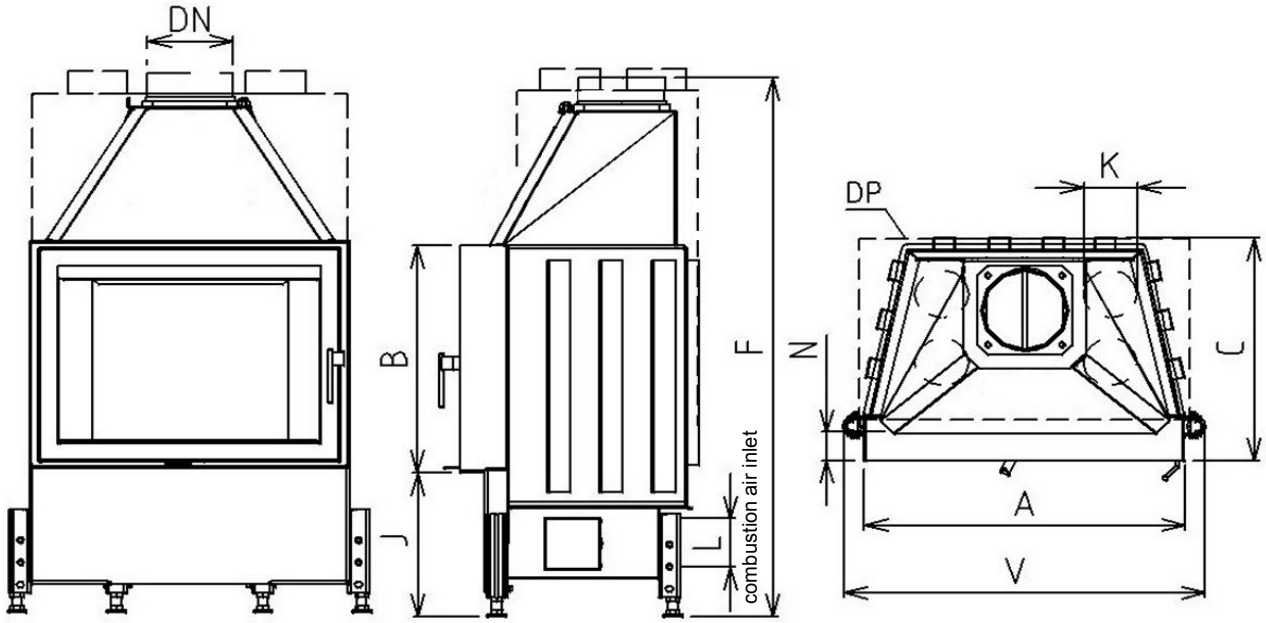


| | Sizes | | CHOPOK L 73 LD 730/450 | CHOPOK L 73 LD 730/510 | CHOPOK L 73 LD 730/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 730 | | |
| 2 | F | mm | 1150 | 1210 | 1270 |
| 3 | C | mm | 505 | | |
| 4 | DN | Ø mm | 180 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 840 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

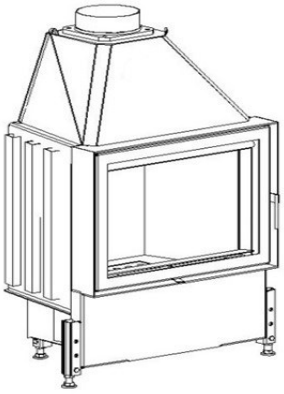

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 10,5 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 77,9 |
| 4 | Average flue gas temperature | | °C | 267 |
| 5 | Wood consuption | | kg/h | 3,3 |
| 6 | Consumption of combustion air | | m 3/hod | 32 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 10,8 |
| 9 | Weight | | kg | 230 |
| 10 | Required min. cross section for circulating air - INPUT | | cm 2 | 325 |
| 11 | Required min. cross section for circulating air - OUTPUT | | cm 2 | 525 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 180 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

**Optional accessories:**

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 78 LD 780/450,510,570


Range 78

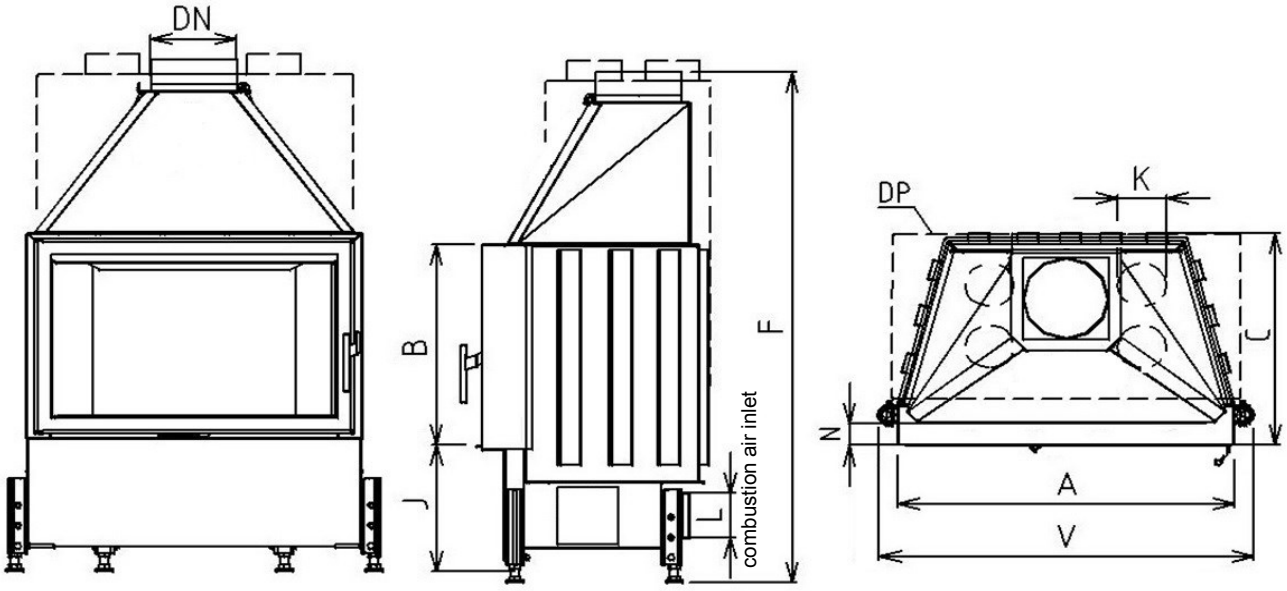


| | Sizes | | CHOPOK L 78 LD 780/450 | CHOPOK L 78 LD 780/510 | CHOPOK L 78 LD 780/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 780 | | |
| 2 | F | mm | 1200 | 1260 | 1320 |
| 3 | C | mm | 535 | | |
| 4 | DN | Ø mm | 200 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 890 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

## Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

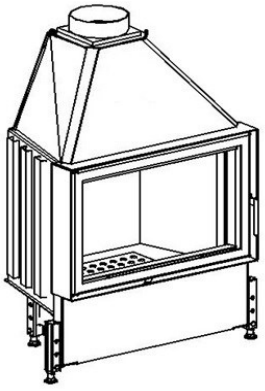

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 11,0 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 77,9 |
| 4 | Average flue gas temperature | | °C | 268 |
| 5 | Wood consuption | | kg/h | 3,5 |
| 6 | Consumption of combustion air | | $m^3$/hod | 33 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 11,6 |
| 9 | Weight | | kg | 245 |
| 10 | Required min. cross section for circulating air - INPUT | | $cm^2$ | 350 |
| 11 | Required min. cross section for circulating air - OUTPUT | | $cm^2$ | 550 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 180 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

## Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 84 LD 840/450,510,570


Range 84

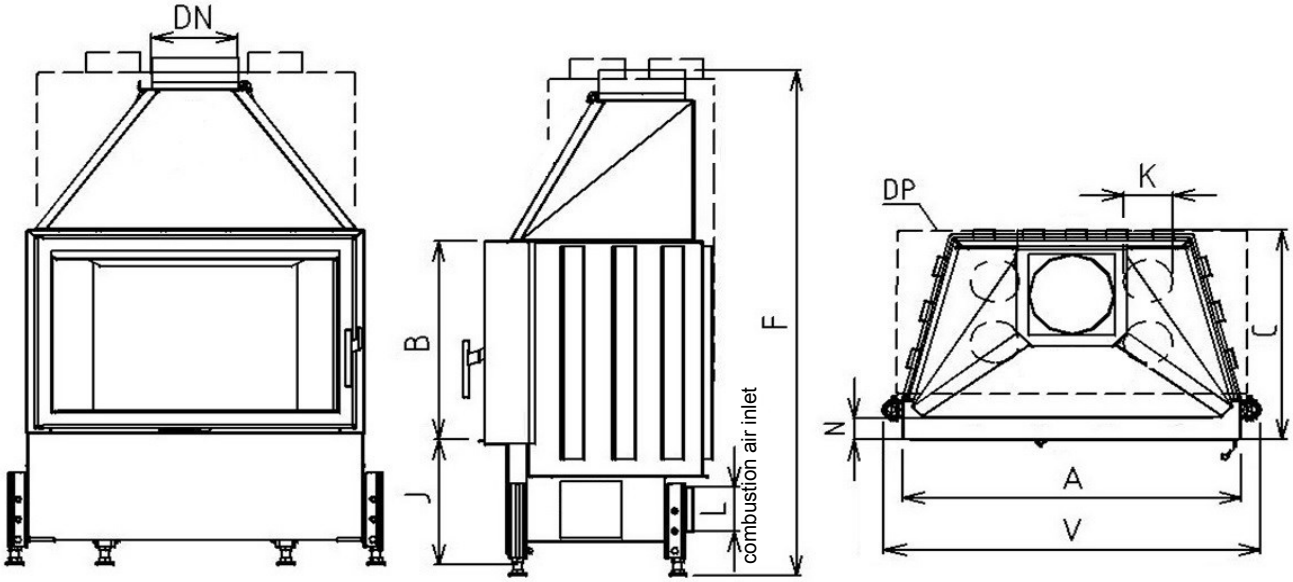


| | Sizes | | CHOPOK L 84 LD 840/450 | CHOPOK L 84 LD 840/510 | CHOPOK L 84 LD 840/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 840 | | |
| 2 | F | mm | 1200 | 1260 | 1320 |
| 3 | C | mm | 535 | | |
| 4 | DN | Ø mm | 200 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 950 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

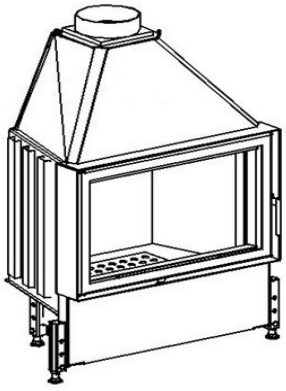

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 11,5 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 77 |
| 4 | Average flue gas temperature | | °C | 255 |
| 5 | Wood consuption | | kg/h | 3,7 |
| 6 | Consumption of combustion air | | $m^3$/hod | 35 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 12,7 |
| 9 | Weight | | kg | 255 |
| 10 | Required min. cross section for circulating air - INPUT | | $cm^2$ | 350 |
| 11 | Required min. cross section for circulating air - OUTPUT | | $cm^2$ | 575 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 180 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

**Optional accessories:**

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

# CHOPOK L 90 LD 900/450,510,570


Range 90

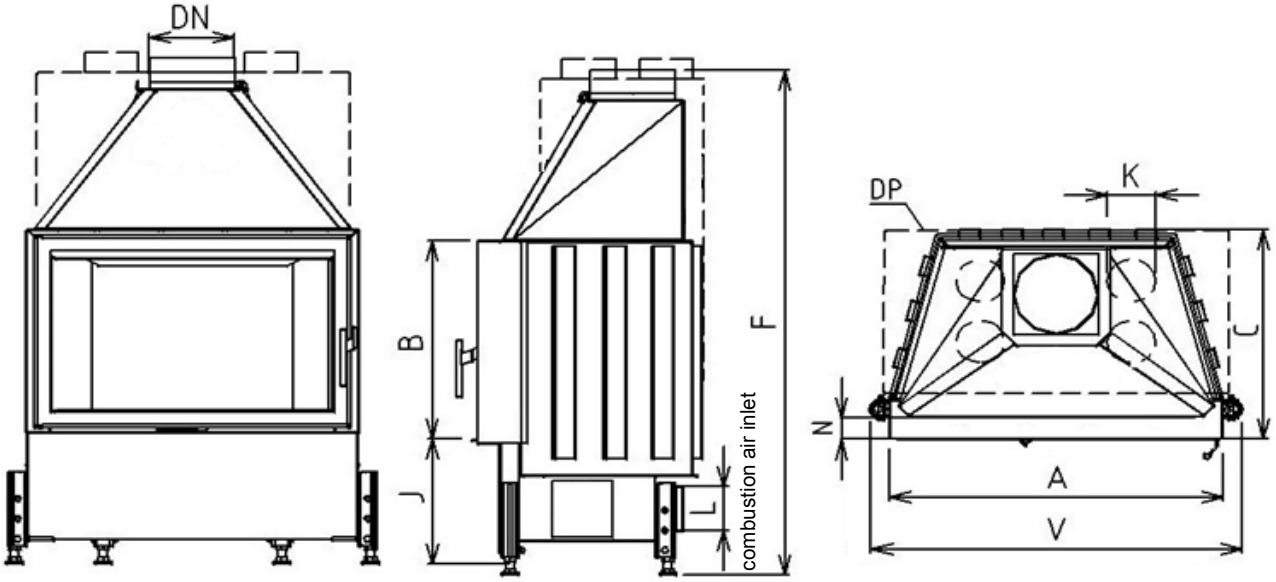


| | Sizes | | CHOPOK L 90 LD 900/450 | CHOPOK L 90 LD 900/510 | CHOPOK L 90 LD 900/570 |
|---|---|---|---|---|---|
| 1 | A | mm | 900 | | |
| 2 | F | mm | 1260 | 1320 | 1380 |
| 3 | C | mm | 535 | | |
| 4 | DN | Ø mm | 200 | | |
| 5 | B | mm | 450 | 510 | 570 |
| 6 | V | mm | 1010 | | |
| 7 | R | mm | | | |
| 8 | AA | mm | | | |
| 9 | H | mm | | | |
| 10 | J | mm | 325 + /160/ | | |
| 11 | K | Ø mm | 4x125 | | |
| 12 | L | Ø mm | 125 | | |
| 13 | M | mm | | | |
| 14 | N | mm | 50 | | |

**Basic design:**

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Enviromentally friendly varnish

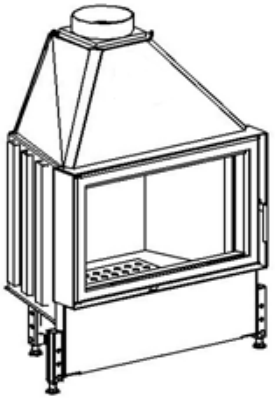

| | Technical parameters | | | |
|---|---|---|---|---|
| 1 | Nominal heat output | | kW | 12,0 |
| 2 | Pressure required | | Pa | 12 |
| 3 | Average efficiency | | % | 78 |
| 4 | Average flue gas temperature | | °C | 269 |
| 5 | Wood consuption | | kg/h | 3,9 |
| 6 | Consumption of combustion air | | m 3/hod | 36 |
| 7 | Emission of CO to 13% O2 | | % | 0,1 |
| 8 | Flue gas mass flow | | g/s | 12 |
| 9 | Weight | | kg | 275 |
| 10 | Required min. cross section for circulating air - INPUT | | cm 2 | 375 |
| 11 | Required min. cross section for circulating air - OUTPUT | | cm 2 | 600 |
| 12 | Three-component insulated chimney - active height 5 m | | Ø cm | 200 |
| 13 | Character of building const-ruction with fireplace insert | warm air convection | | Yes |
| | | heat storage without conv | | Yes |

**Optional accessories:**

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk