
CHOPOK LE 78 VD 850/630

Range 78

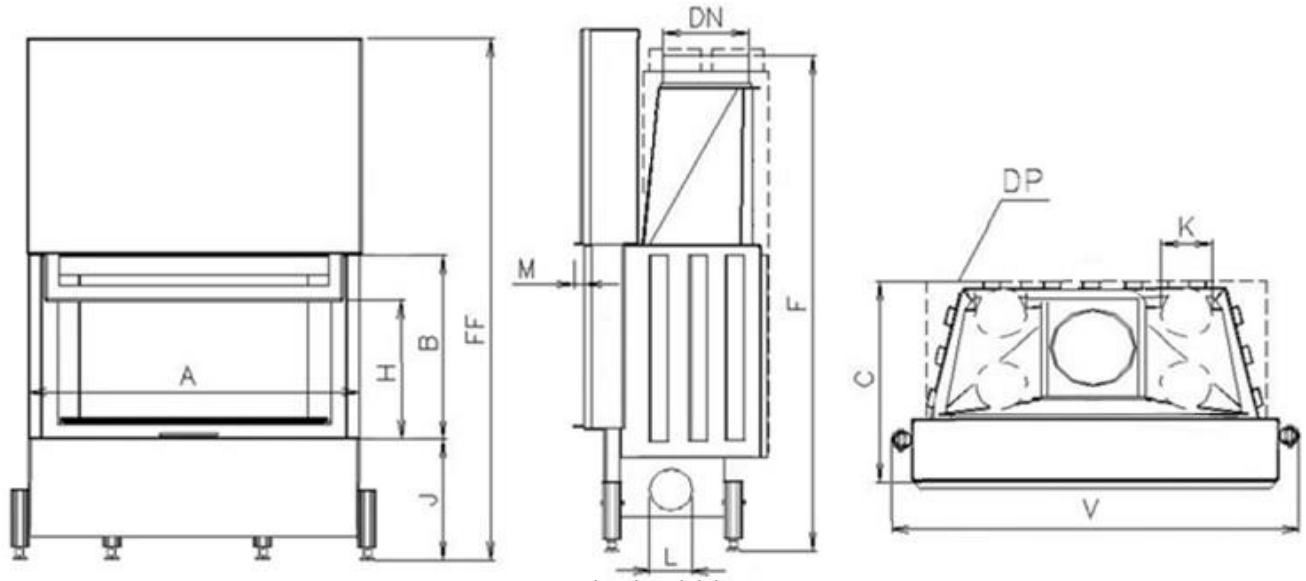


combustion air inlet

	Sizes		CHOPOK LE 78 VD 850/630
1	A		850
2	F	mm	1605
3	C	mm	610
4	DN	Ø mm	200
5	B	mm	630
6	FF	mm	1710
7	V	mm	960
8	AA	mm	
9	H	mm	460
10	J	mm	325 + /160/
11	K	Ø mm	4x125
12	L	Ø mm	125
13	M	mm	20
14	N	mm	

Basic design:

Thermodynamic Hearth
Segment chamotte lining SO
Glass Classic
Inox control grip-handle MP2
Enviromentally friendly varnish

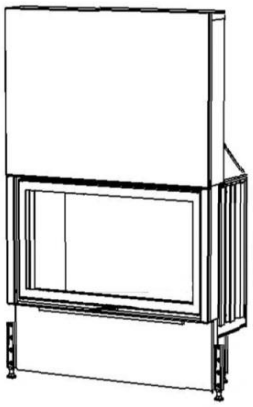

	Technical parameters			
1	Nominal heat output		kW	12,0
2	Pressure required		Pa	12
3	Average efficiency		%	76,9
4	Average flue gas temperature		°C	286
5	Wood consuption		kg/h	3,9
6	Consumption of combustion air		m 3/hod	36
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	12,2
9	Weight		kg	370
10	Required min. cross section for circulating air - INPUT		cm 2	375
11	Required min. cross section for circulating air - OUTPUT		cm 2	600
12	Three-component insulated chimney - active height 6 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Double glass Modern(DSM)
Lower hearth (ZO)
External ashtray (VOP)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BlmSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK LE 90 VD 970/710

Range 90

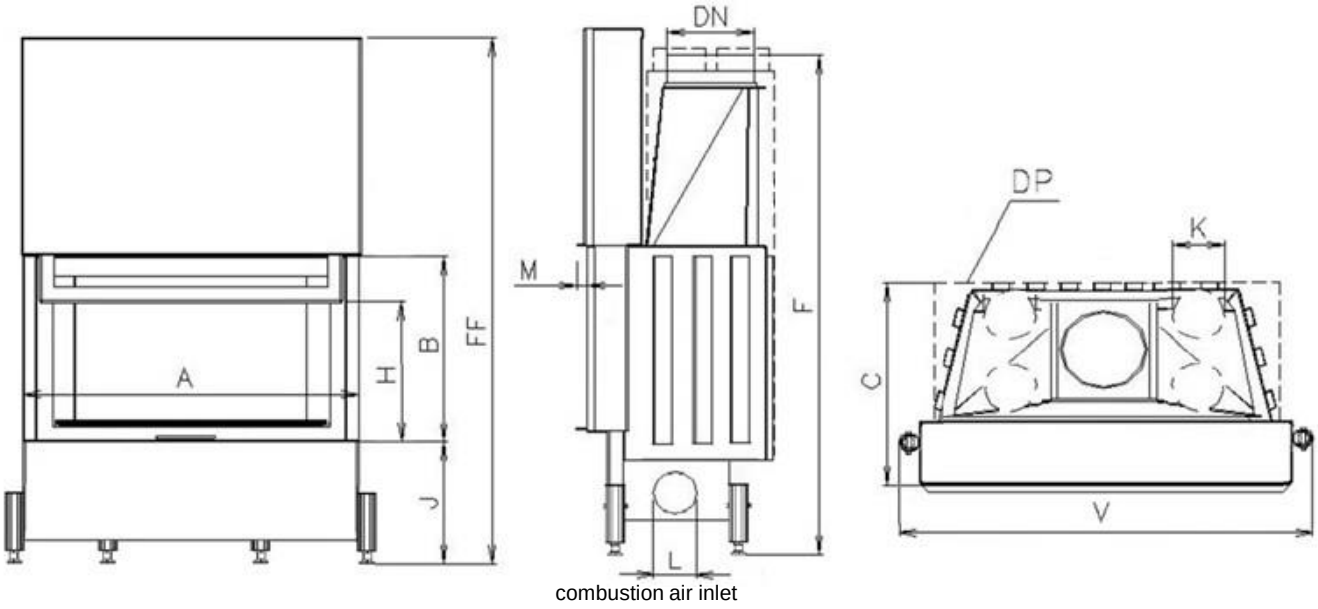


combustion air inlet

	Sizes		CHOPOK LE 90 VD 970/710
1	A		970
2	F	mm	1685
3	C	mm	610
4	DN	Ø mm	200
5	B	mm	710
6	FF	mm	1920
7	V	mm	1080
8	AA	mm	
9	H	mm	535
10	J	mm	325 + /160/
11	K	Ø mm	4x125
12	L	Ø mm	125
13	M	mm	20
14	N	mm	

Basic design:

Thermodynamic Hearth
Segment chamotte lining SO
Glass Classic
Inox control grip-handle MP2
Enviromentally friendly varnish

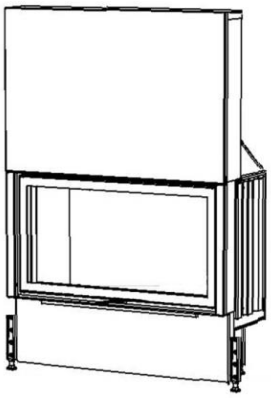

	Technical parameters			
1	Nominal heat output		kW	13,0
2	Pressure required		Pa	12
3	Average efficiency		%	78,1
4	Average flue gas temperature		°C	268
5	Wood consuption		kg/h	4,2
6	Consumption of combustion air		m^3/hod	39
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	12,7
9	Weight		kg	430
10	Required min. cross section for circulating air - INPUT		cm^2	400
11	Required min. cross section for circulating air - OUTPUT		cm^2	650
12	Three-component insulated chimney - active height 7 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Double glass Modern(DSM)
Lower hearth (ZO)
External ashtray (VOP)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK LE 100 VD 1070/760

Range 100

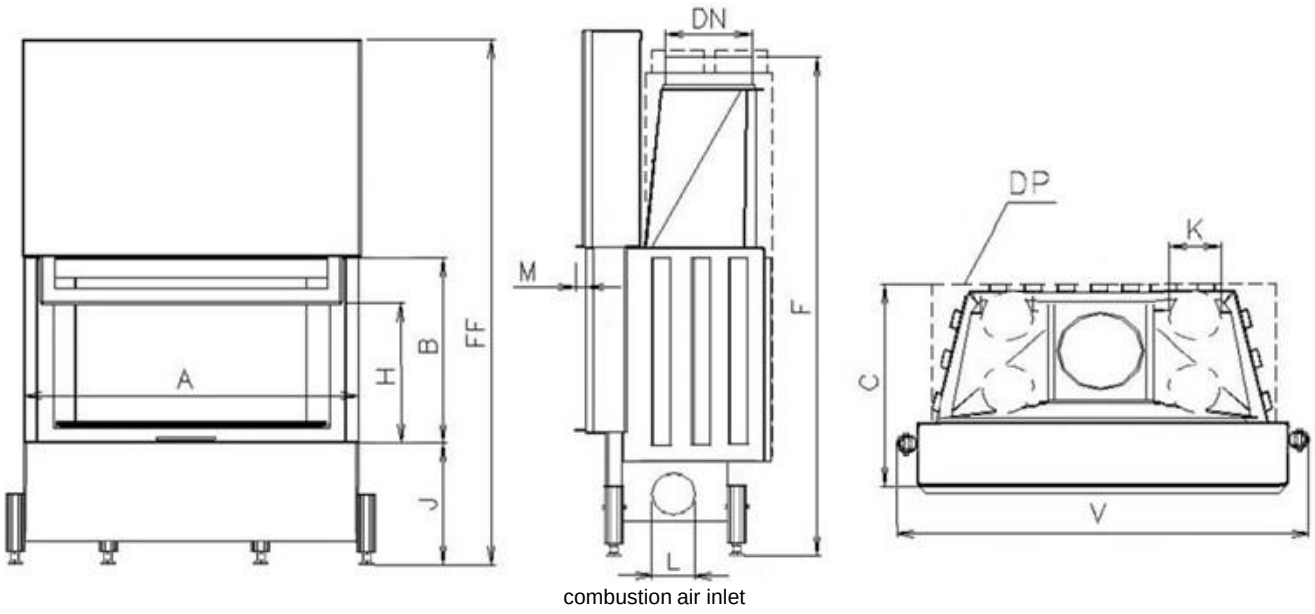


combustion air inlet

	Sizes		CHOPOK LE 100 VD 1070/760
1	A		1070
2	F	mm	1735
3	C	mm	610
4	DN	Ø mm	250
5	B	mm	760
6	FF	mm	1970
7	V	mm	1180
8	AA	mm	
9	H	mm	600
10	J	mm	325 + /160/
11	K	Ø mm	4x125
12	L	Ø mm	150
13	M	mm	20
14	N	mm	

Basic design:

Thermodynamic Hearth
Segment chamotte lining SO
Glass Classic
Inox control grip-handle MP2
Enviromentally friendly varnish

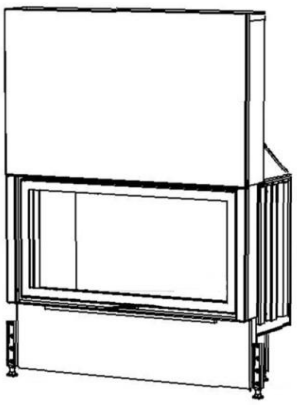

	Technical parameters			
1	Nominal heat output		kW	14,0
2	Pressure required		Pa	12
3	Average efficiency		%	79,3
4	Average flue gas temperature		°C	251
5	Wood consuption		kg/h	4,6
6	Consumption of combustion air		m^3/hod	42
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	13,3
9	Weight		kg	500
10	Required min. cross section for circulating air - INPUT		cm^2	425
11	Required min. cross section for circulating air - OUTPUT		cm^2	700
12	Three-component insulated chimney - active height 8 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Double glass Modern(DSM)
Lower hearth (ZO)
External ashtray (VOP)
Convectional casing (DP)
Rear feeding door (PD)
Vertical heat-storing panel (AZ)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk