
CHOPOK O 50 LD 500/450,510,570


Range 50

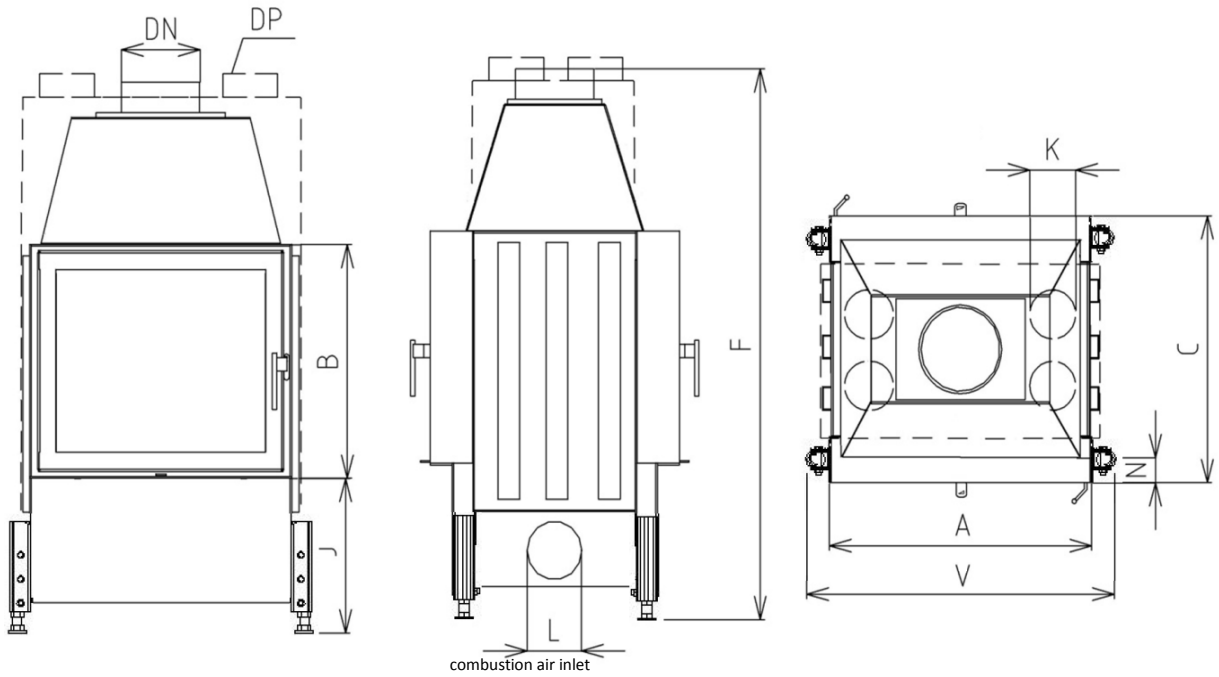

	Sizes		CHOPOK O 50 LD 500/450	CHOPOK O 50 LD 500/510	CHOPOK O 50 LD 500/570
1	A	mm	500		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	160		
5	B	mm	450	510	570
6	V	mm	610		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet (EPV)
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle RP2
Coated with ecological paint

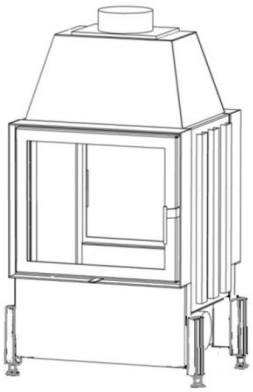

	Technical parameters			
1	Nominal heat output		kW	7,5
2	Pressure required		Pa	12
3	Average efficiency		%	76,2
4	Average flue gas temperature		°C	253
5	Wood consuption		kg/h	2,8
6	Consumption of combustion air		m^3/h	23
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	9,4
9	Weight		kg	195
10	Required min. cross section for circulating air - INPUT		cm^2	225
11	Required min. cross section for circulating air - OUTPUT		cm^2	375
12	Three-component insulated chimney - active height 5 m		Ø cm	160
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes


Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant(APO)

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 55 LD 550/450,510,570


Range 55

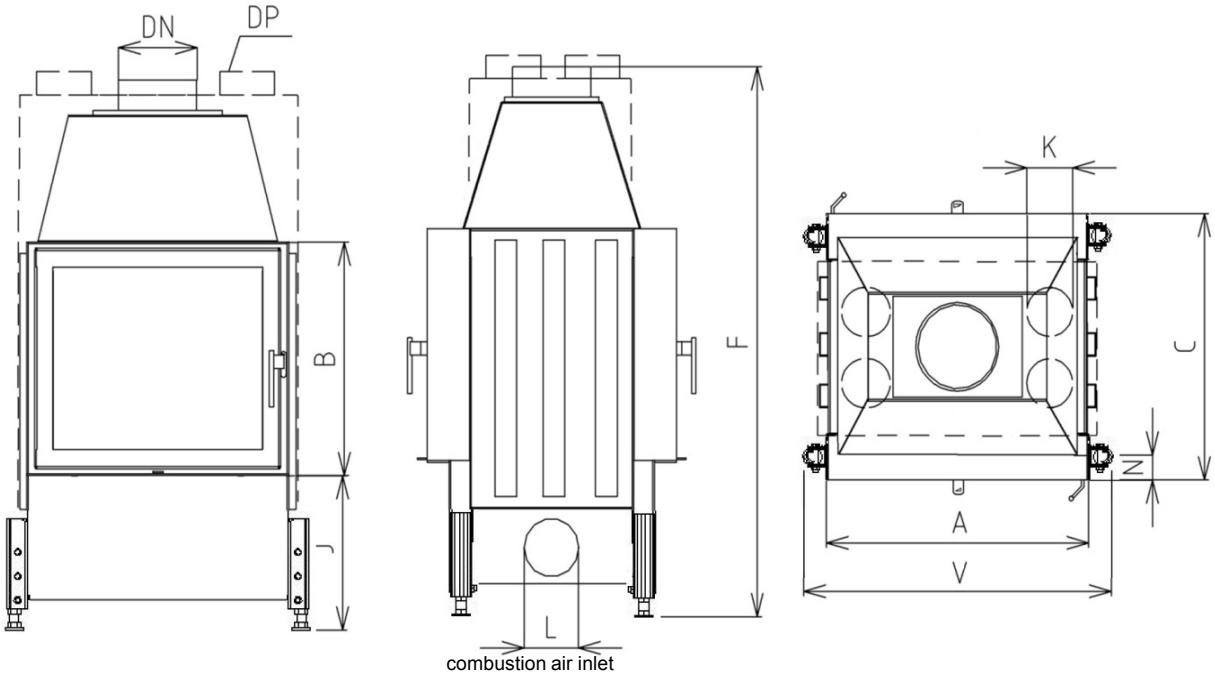

	Sizes		CHOPOK O 55 LD 550/450	CHOPOK O 55 LD 550/510	CHOPOK O 55 LD 550/570
1	A	mm	550		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	V	mm	660		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish

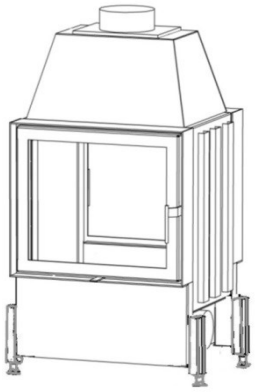

	Technical parameters			
1	Nominal heat output		kW	8,0
2	Pressure required		Pa	12
3	Average efficiency		%	76
4	Average flue gas temperature		°C	253
5	Wood consuption		kg/h	2,9
6	Consumption of combustion air		m3/h	24
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	9,8
9	Weight		kg	205
10	Required min. cross section for circulating air - INPUT		cm^2	250
11	Required min. cross section for circulating air - OUTPUT		cm^2	400
12	Three-component insulated chimney - active height 5 m		Ø cm	160
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 60 LD 600/450,510,570

Range 60

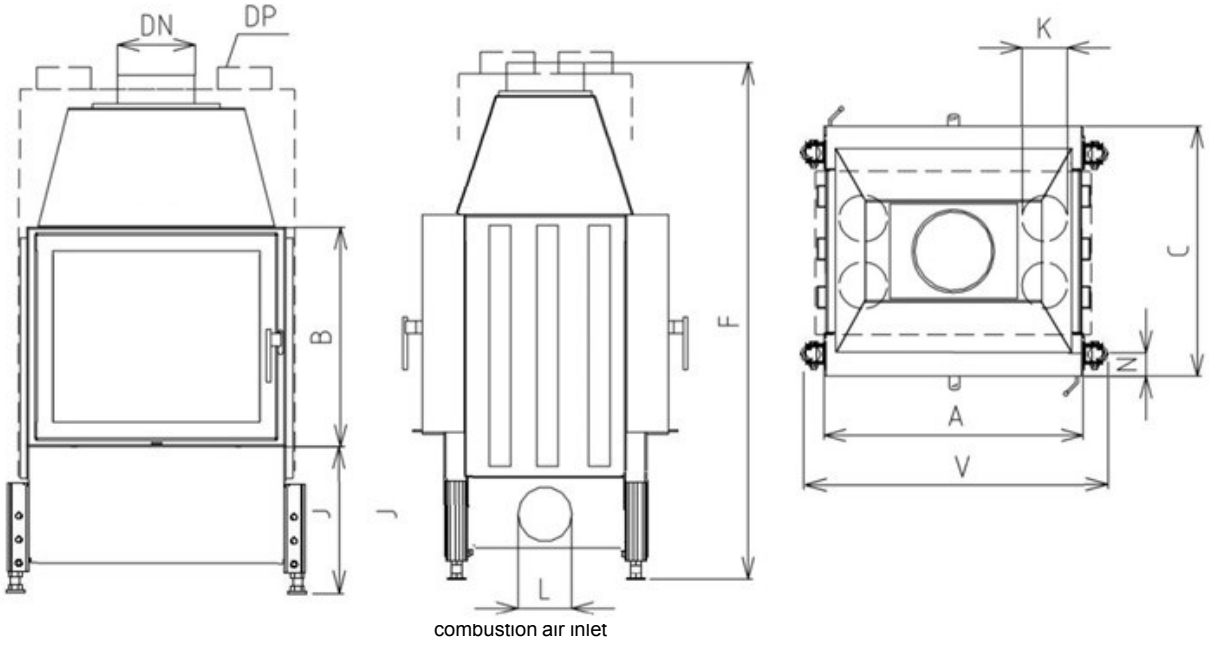


combustion air inlet

	Sizes		CHOPOK O 60 LD 600/450	CHOPOK O 60 LD 600/510	CHOPOK O 60 LD 600/570
1	A	mm	600		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	V	mm	710		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish

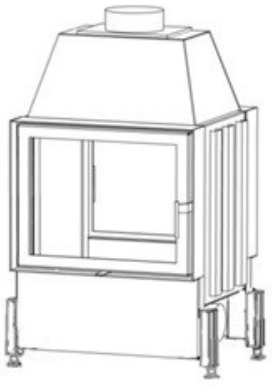

	Technical parameters			
1	Nominal heat output		kW	9,0
2	Pressure required		Pa	12
3	Average efficiency		%	77
4	Average flue gas temperature		°C	257
5	Wood consuption		kg/h	3
6	Consumption of combustion air		m3/h	27
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	10
9	Weight		kg	220
10	Required min. cross section for circulating air - INPUT		cm^2	275
11	Required min. cross section for circulating air - OUTPUT		cm^2	450
12	Three-component insulated chimney - active height 5 m		Ø cm	160
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 67 LD 670/450,510,570


Range 67

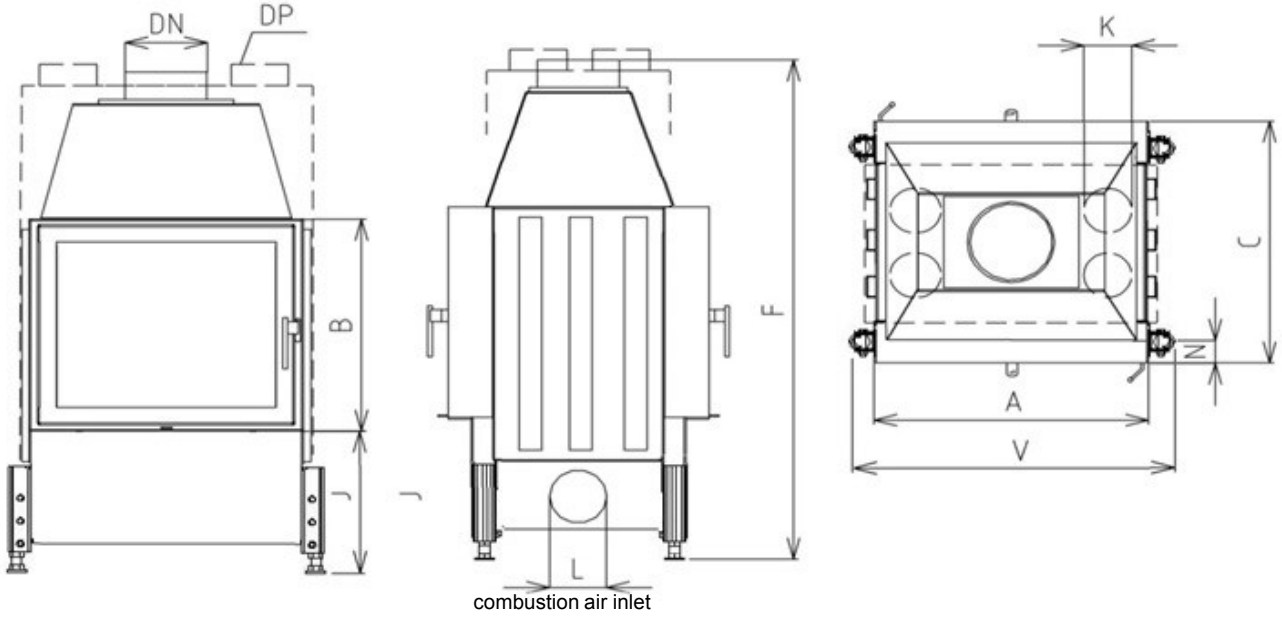

	Sizes		CHOPOK O 67 LD 670/450	CHOPOK O 67 LD 670/510	CHOPOK O 67 LD 670/570
1	A	mm	670		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	V	mm	780		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish

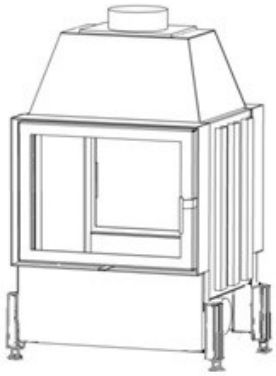

	Technical parameters			
1	Nominal heat output		kW	10,0
2	Pressure required		Pa	12
3	Average efficiency		%	77,1
4	Average flue gas temperature		°C	260
5	Wood consuption		kg/h	3,2
6	Consumption of combustion air		m3/h	30
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	10,6
9	Weight		kg	235
10	Required min. cross section for circulating air - INPUT		cm^2	300
11	Required min. cross section for circulating air - OUTPUT		cm^2	500
12	Three-component insulated chimney - active height 5 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 73 LD 730/450,510,570

Range 73

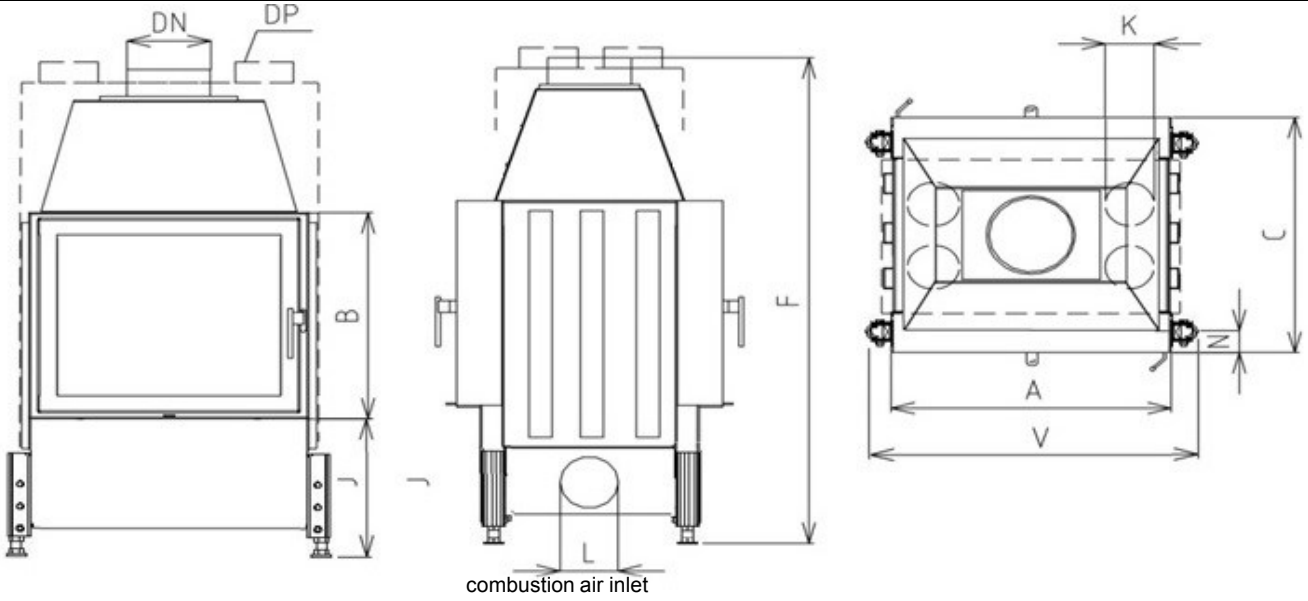


combustion air inlet

	Sizes		CHOPOK O 73 LD 730/450	CHOPOK O 73 LD 730/510	CHOPOK O 73 LD 730/570
1	A	mm	730		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	V	mm	840		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish

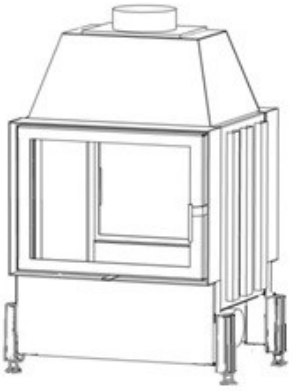

	Technical parameters			
1	Nominal heat output		kW	10,5
2	Pressure required		Pa	12
3	Average efficiency		%	77,6
4	Average flue gas temperature		°C	264
5	Wood consuption		kg/h	3,3
6	Consumption of combustion air		m3/h	32
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	11,1
9	Weight		kg	250
10	Required min. cross section for circulating air - INPUT		cm^2	325
11	Required min. cross section for circulating air - OUTPUT		cm^2	525
12	Three-component insulated chimney - active height 5 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 78 LD 780/450,510,570


Range 78

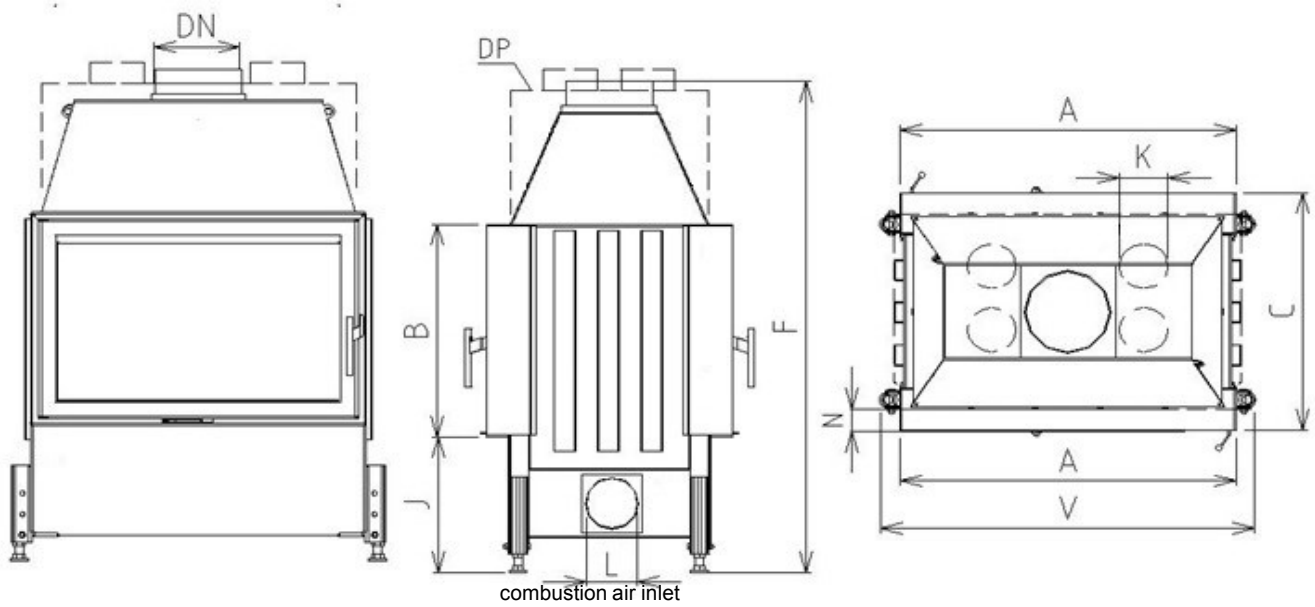

	Sizes		CHOPOK O 78 LD 780/450	CHOPOK O 78 LD 780/510	CHOPOK O 78 LD 780/570
1	A	mm	780		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	V	mm	890		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish

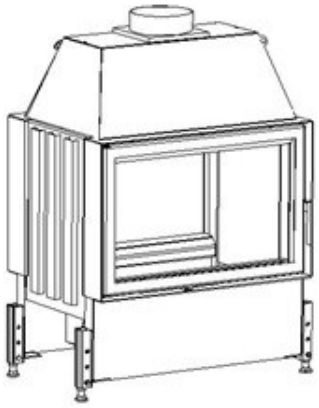

	Technical parameters			
1	Nominal heat output		kW	11,0
2	Pressure required		Pa	12
3	Average efficiency		%	78
4	Average flue gas temperature		°C	267
5	Wood consuption		kg/h	3,5
6	Consumption of combustion air		m3/h	33
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	11,5
9	Weight		kg	265
10	Required min. cross section for circulating air - INPUT		cm^2	350
11	Required min. cross section for circulating air - OUTPUT		cm^2	550
12	Three-component insulated chimney - active height 6 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 84 LD 840/450,510,570


Range 84

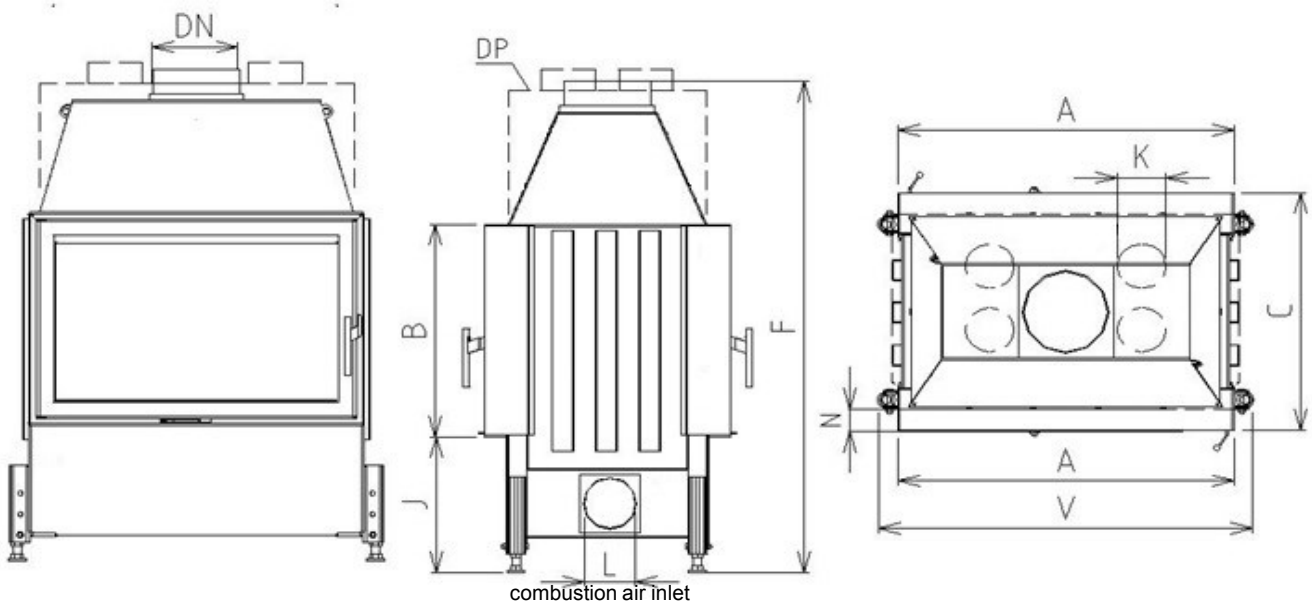

	Sizes		CHOPOK O 84 LD 840/450	CHOPOK O 84 LD 840/510	CHOPOK O 84 LD 840/570
1	A	mm	840		
2	F	mm	1120	1180	1240
3	C	mm	570		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	V	mm	610		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish

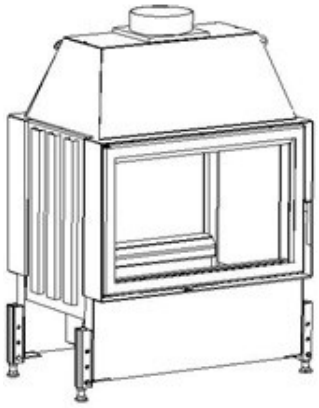

	Technical parameters			
1	Nominal heat output		kW	11,5
2	Pressure required		Pa	12
3	Average efficiency		%	76,1
4	Average flue gas temperature		°C	256
5	Wood consuption		kg/h	3,8
6	Consumption of combustion air		m3/h	35
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	14,6
9	Weight		kg	275
10	Required min. cross section for circulating air - INPUT		cm^2	350
11	Required min. cross section for circulating air - OUTPUT		cm^2	575
12	Three-component insulated chimney - active height 6 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 90 LD 900/450,510,570

Range 90

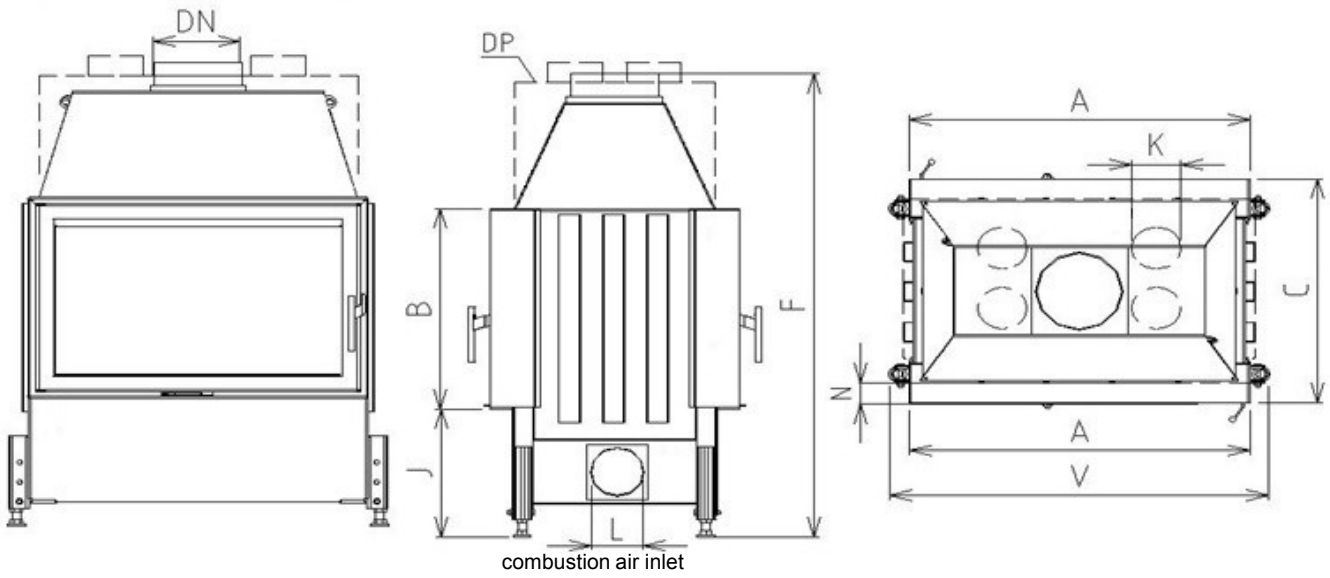

combustion air inlet

	Sizes		CHOPOK O 90 LD 900/450	CHOPOK O 90 LD 900/510	CHOPOK O 90 LD 900/570
1	A	mm	900		
2	F	mm	1150	1210	1270
3	C	mm	570		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	V	mm	1010		
7	R	mm			
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm			
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle 2xRP2
Enviromentally friendly varnish



	Technical parameters			
1	Nominal heat output		kW	12,0
2	Pressure required		Pa	12
3	Average efficiency		%	78,5
4	Average flue gas temperature		°C	271
5	Wood consuption		kg/h	3,9
6	Consumption of combustion air		m3/h	36
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	11,9
9	Weight		kg	285
10	Required min. cross section for circulating air - INPUT		cm^2	375
11	Required min. cross section for circulating air - OUTPUT		cm^2	600
12	Three-component insulated chimney - active height 5 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		Yes

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Heat accumulation quadrant (APO)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk