
CHOPOK O 50 VD 570/450,510,570


Range 50

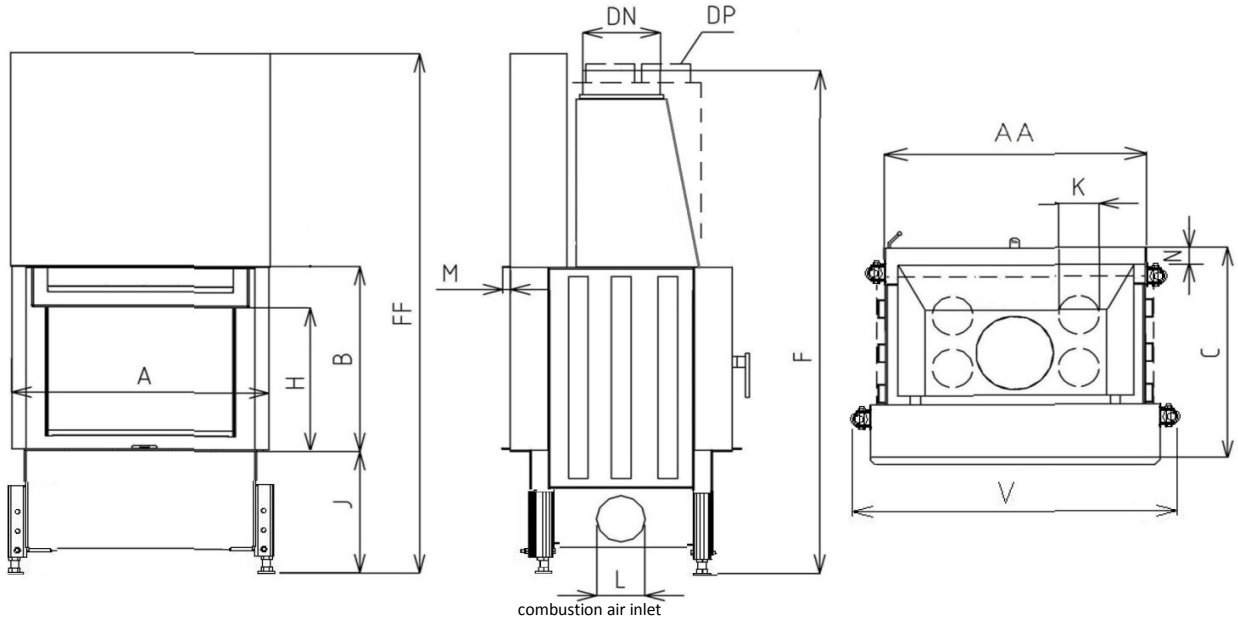

	Sizes		CHOPOK O 50 VD 570/450	CHOPOK O 50 VD 570/510	CHOPOK O 50 VD 570/570
1	A	mm	570		
2	F	mm	1250	1310	1370
3	C	mm	580		
4	DN	Ø mm	160		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	680		
8	AA	mm	500		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet (EPV)
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2,RP2
1 x VD, 1 x LD
Coated with ecological paint

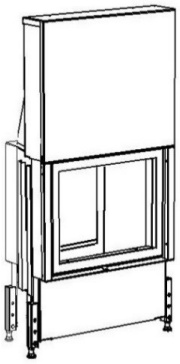

	Technical parameters			
1	Nominal heat output		kW	7,5
2	Pressure required		Pa	12
3	Average efficiency		%	76,2
4	Average flue gas temperature		°C	249
5	Wood consuption		kg/h	2,8
6	Consumption of combustion air		m^3/h	23
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	9,4
9	Weight		kg	235
10	Required min. cross section for circulating air - INPUT		cm^2	225
11	Required min. cross section for circulating air - OUTPUT		cm^2	375
12	Three-component insulated chimney - active height 5 m		Ø cm	160
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No


Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 55 VD 620/450,510,570


Range 55

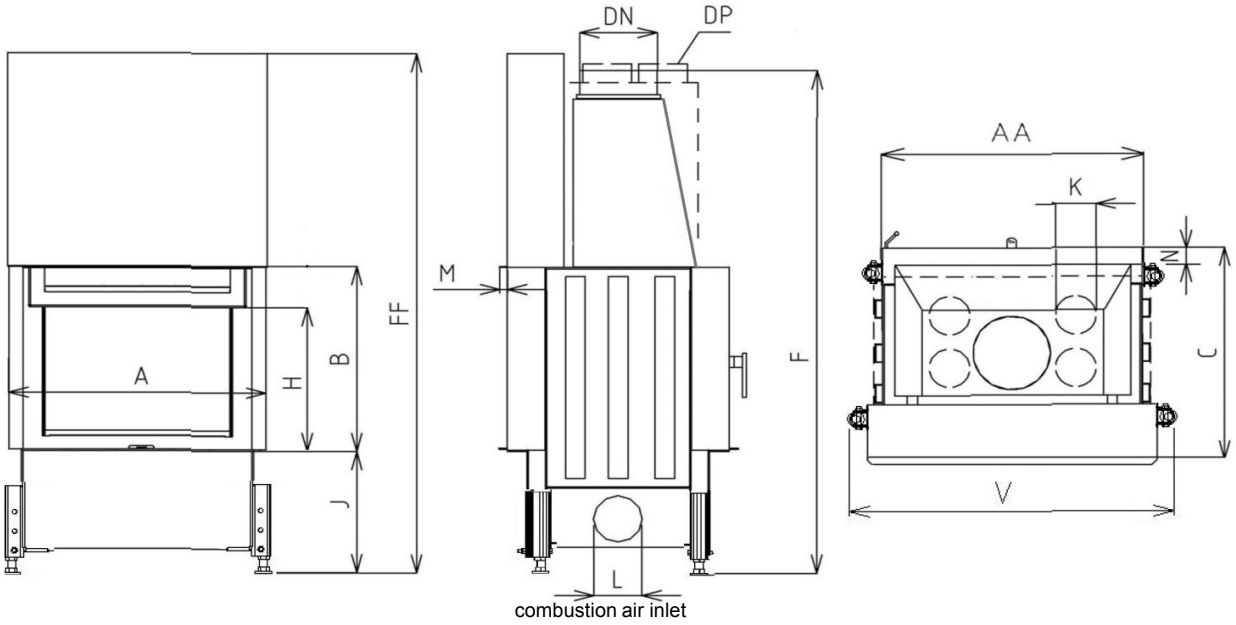

	Sizes		CHOPOK O 55 VD 620/450	CHOPOK O 55 VD 620/510	CHOPOK O 55 VD 620/570
1	A	mm	620		
2	F	mm	1250	1310	1370
3	C	mm	580		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	730		
8	AA	mm	550		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

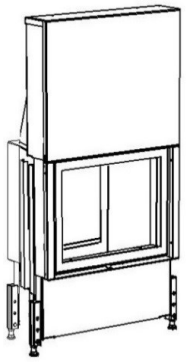

	Technical parameters			
1	Nominal heat output		kW	8,0
2	Pressure required		Pa	12
3	Average efficiency		%	76,2
4	Average flue gas temperature		°C	253
5	Wood consuption		kg/h	2,9
6	Consumption of combustion air		m3/h	24
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	9,8
9	Weight		kg	250
10	Required min. cross section for circulating air - INPUT		cm^2	250
11	Required min. cross section for circulating air - OUTPUT		cm^2	400
12	Three-component insulated chimney - active height 5 m		Ø cm	160
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 60 VD 670/450,510,570


Range 60

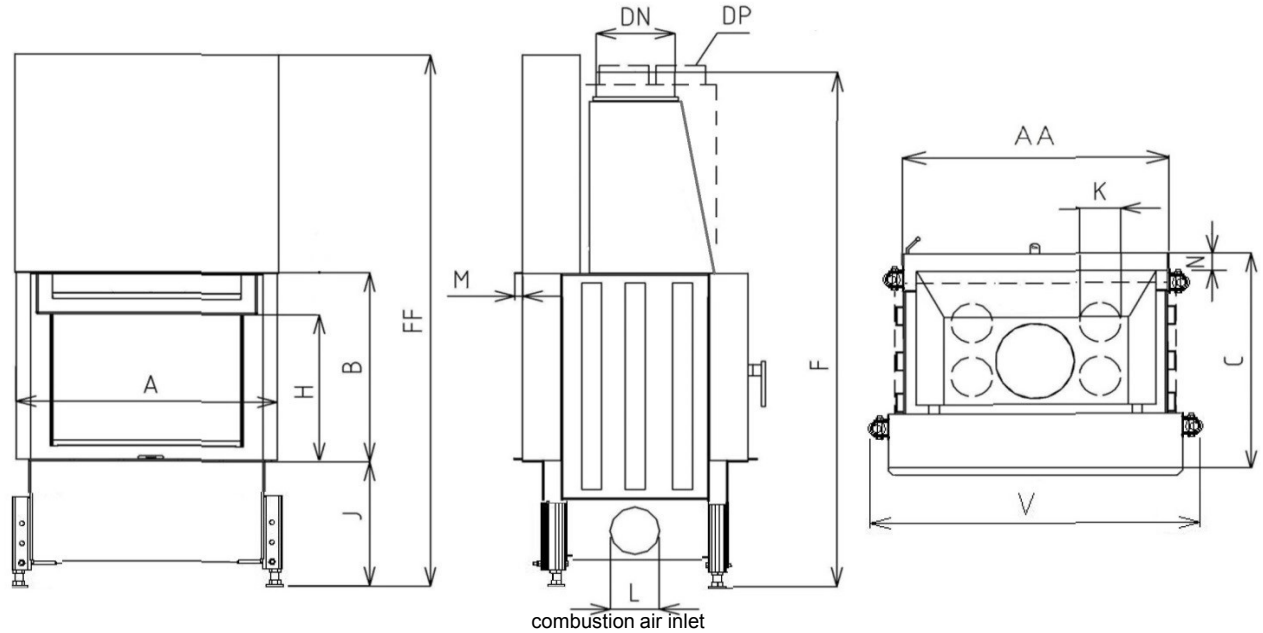

	Sizes		CHOPOK O 60 VD 670/450	CHOPOK O 60 VD 670/510	CHOPOK O 60 VD 670/570
1	A	mm	670		
2	F	mm	1250	1310	1370
3	C	mm	580		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	780		
8	AA	mm	600		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

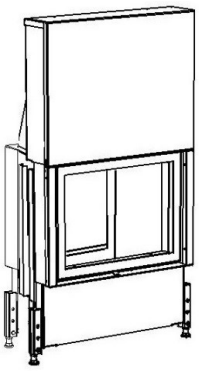

	Technical parameters			
1	Nominal heat output		kW	9,0
2	Pressure required		Pa	12
3	Average efficiency		%	76,7
4	Average flue gas temperature		°C	257
5	Wood consuption		kg/h	3
6	Consumption of combustion air		m3/h	27
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	10,2
9	Weight		kg	265
10	Required min. cross section for circulating air - INPUT		cm^2	275
11	Required min. cross section for circulating air - OUTPUT		cm^2	450
12	Three-component insulated chimney - active height 6 m		Ø cm	160
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 67 VD 740/450,510,570


Range 67

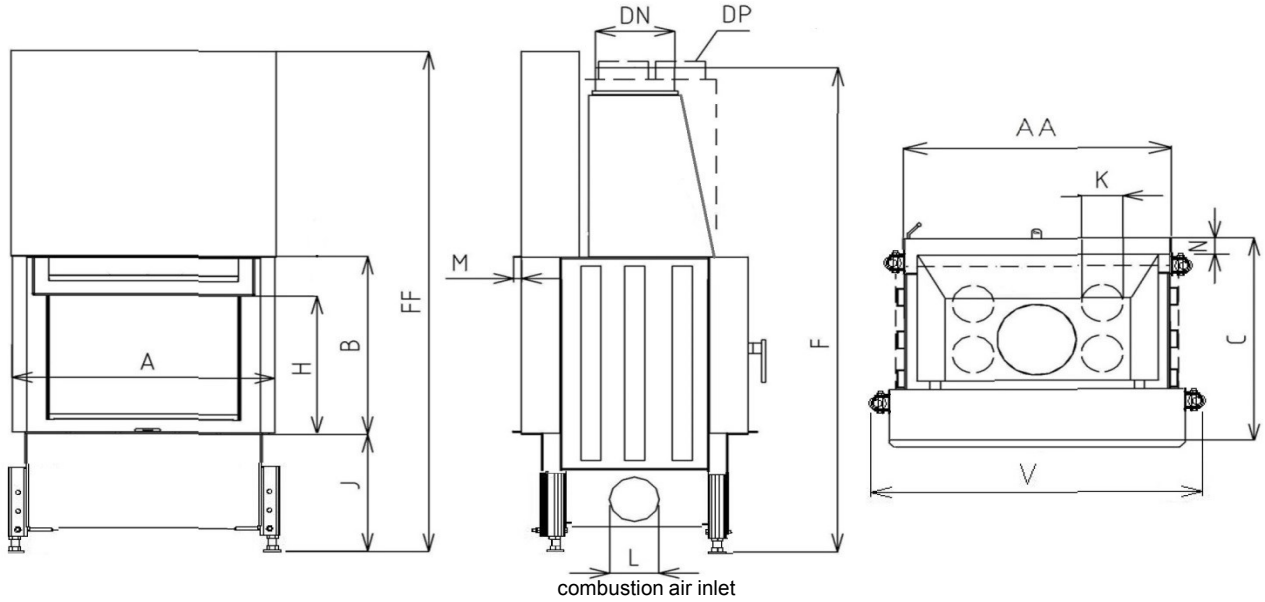

	Sizes		CHOPOK O 67 VD 740/450	CHOPOK O 67 VD 740/510	CHOPOK O 67 VD 740/570
1	A	mm	740		
2	F	mm	1300	1360	1420
3	C	mm	580		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	850		
8	AA	mm	670		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

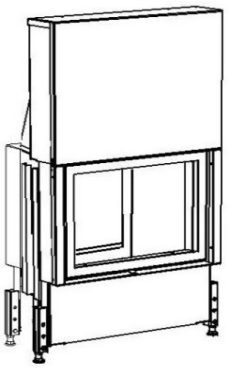

	Technical parameters			
1	Nominal heat output		kW	10,0
2	Pressure required		Pa	12
3	Average efficiency		%	77,1
4	Average flue gas temperature		°C	260
5	Wood consuption		kg/h	3,2
6	Consumption of combustion air		m3/h	30
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	10,6
9	Weight		kg	285
10	Required min. cross section for circulating air - INPUT		cm^2	300
11	Required min. cross section for circulating air - OUTPUT		cm^2	500
12	Three-component insulated chimney - active height 5 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 73 VD 800/450,510,570

Range 73

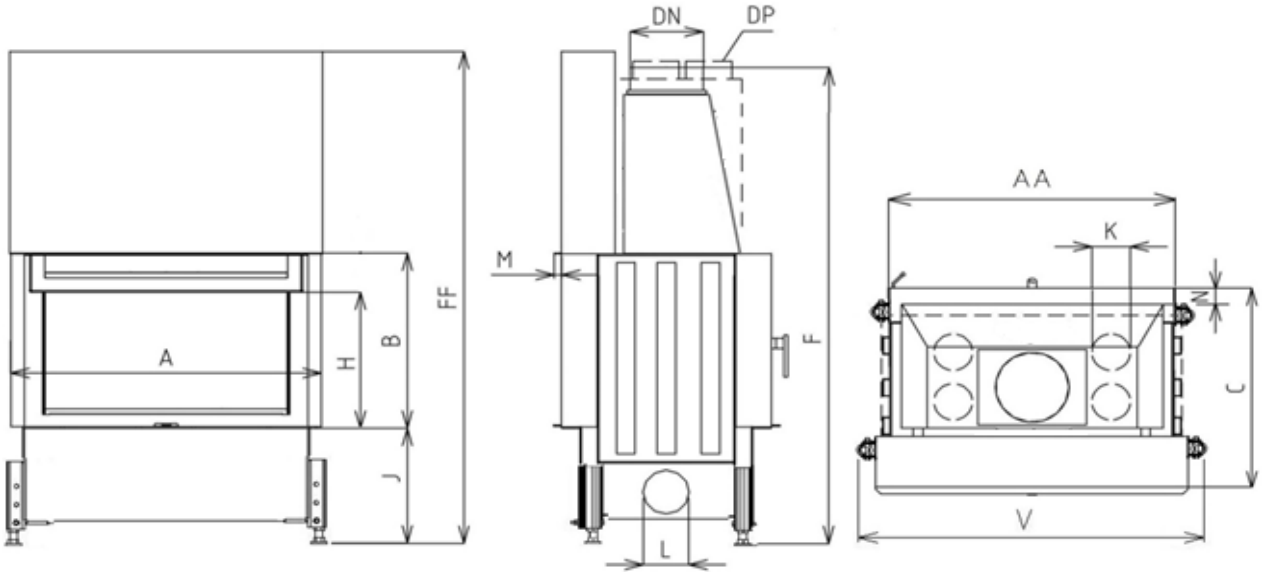


combustion air inlet

	Sizes		CHOPOK O 73 VD 800/450	CHOPOK O 73 VD 800/510	CHOPOK O 73 VD 800/570
1	A	mm	800		
2	F	mm	1300	1360	1420
3	C	mm	580		
4	DN	Ø mm	180		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	910		
8	AA	mm	730		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

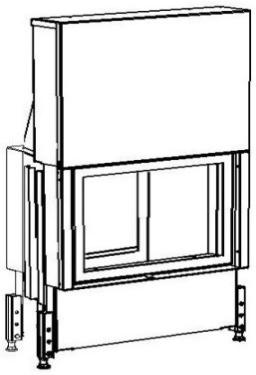

	Technical parameters			
1	Nominal heat output		kW	10,5
2	Pressure required		Pa	12
3	Average efficiency		%	77,6
4	Average flue gas temperature		°C	264
5	Wood consuption		kg/h	3,3
6	Consumption of combustion air		m3/h	32
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	11,1
9	Weight		kg	300
10	Required min. cross section for circulating air - INPUT		cm^2	325
11	Required min. cross section for circulating air - OUTPUT		cm^2	525
12	Three-component insulated chimney - active height 5 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 78 VD 850/450,510,570

Range 78

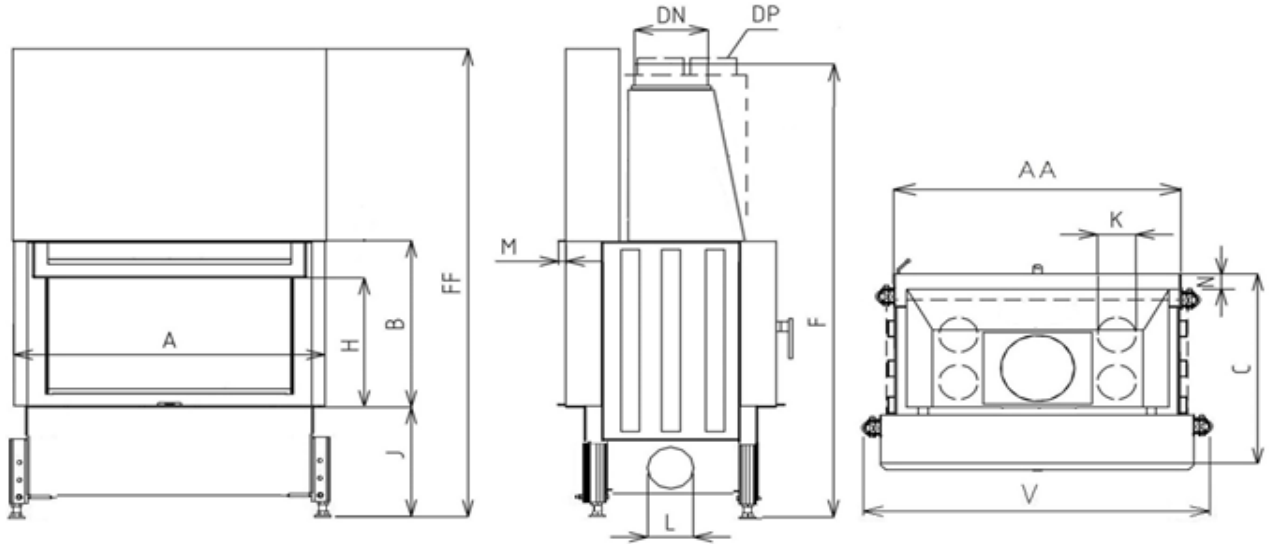


combustion air inlet

	Sizes		CHOPOK O 78 VD 850/450	CHOPOK O 78 VD 850/510	CHOPOK O 78 VD 850/570
1	A	mm	850		
2	F	mm	1300	1360	1420
3	C	mm	580		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	960		
8	AA	mm	780		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

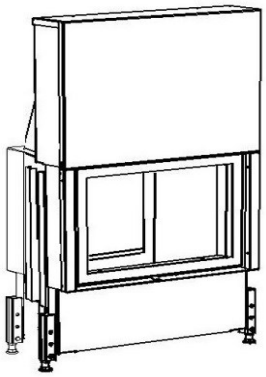

	Technical parameters			
1	Nominal heat output		kW	11,0
2	Pressure required		Pa	12
3	Average efficiency		%	78
4	Average flue gas temperature		°C	267
5	Wood consuption		kg/h	3,5
6	Consumption of combustion air		m3/h	33
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	11,5
9	Weight		kg	320
10	Required min. cross section for circulating air - INPUT		cm^2	350
11	Required min. cross section for circulating air - OUTPUT		cm^2	550
12	Three-component insulated chimney - active height 6 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 84 VD 910/450,510,570

Range 84

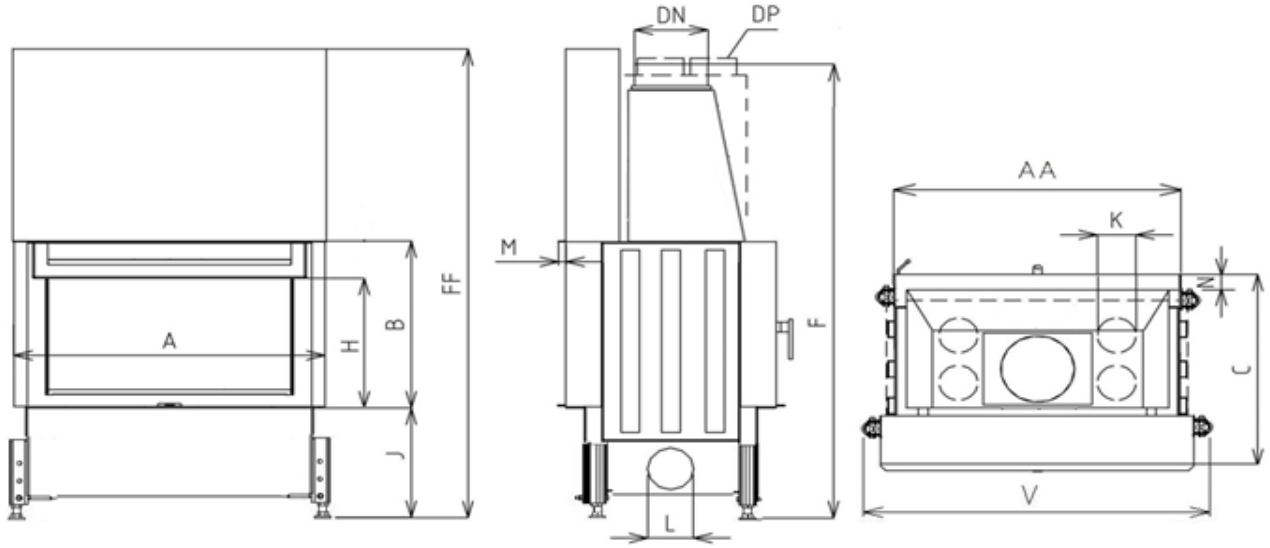


combustion air inlet

	Sizes		CHOPOK O 84 VD 910/450	CHOPOK O 84 VD 910/510	CHOPOK O 84 VD 910/570
1	A	mm	910		
2	F	mm	1300	1360	1420
3	C	mm	580		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	1020		
8	AA	mm	840		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

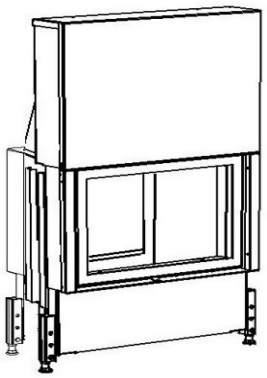

	Technical parameters			
1	Nominal heat output		kW	11,5
2	Pressure required		Pa	12
3	Average efficiency		%	76,1
4	Average flue gas temperature		°C	256
5	Wood consuption		kg/h	3,8
6	Consumption of combustion air		m3/h	35
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	14,6
9	Weight		kg	330
10	Required min. cross section for circulating air - INPUT		cm^2	350
11	Required min. cross section for circulating air - OUTPUT		cm^2	575
12	Three-component insulated chimney - active height 6 m		Ø cm	180
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 90 VD 970/450,510,570

Range 90

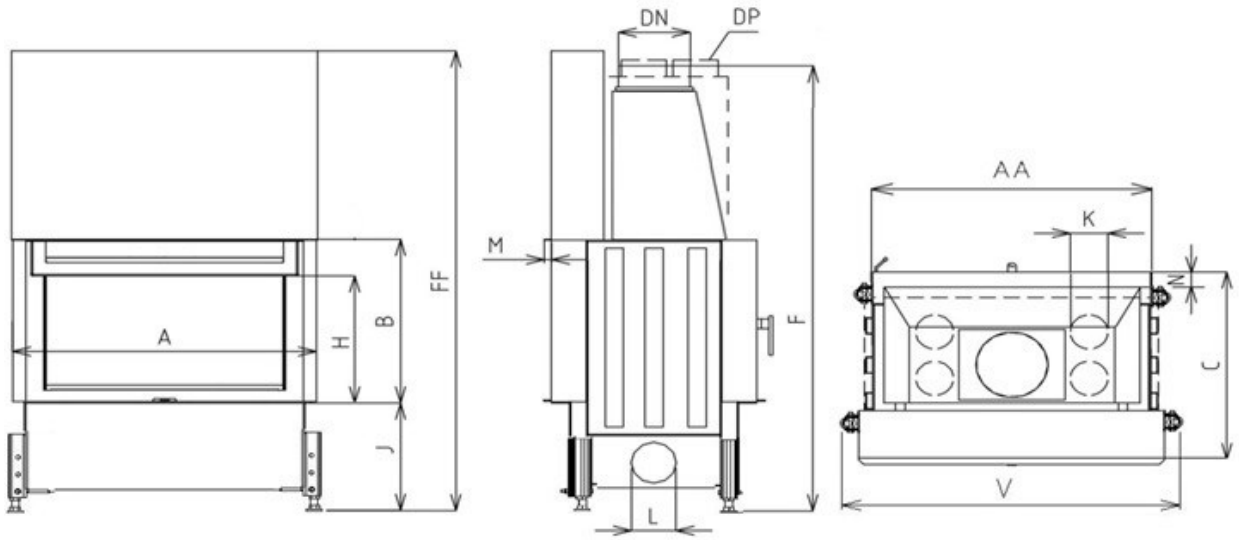


combustion air inlet

	Sizes		CHOPOK O 90 VD 970/450	CHOPOK O 90 VD 970/510	CHOPOK O 90 VD 970/570
1	A	mm	970		
2	F	mm	1300	1360	1420
3	C	mm	580		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	1080		
8	AA	mm	900		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

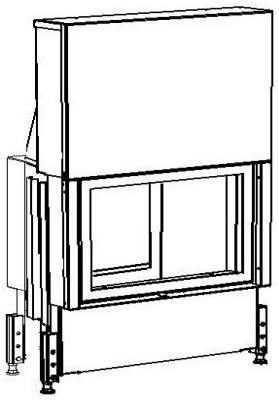

	Technical parameters			
1	Nominal heat output		kW	12,0
2	Pressure required		Pa	12
3	Average efficiency		%	78,5
4	Average flue gas temperature		°C	271
5	Wood consuption		kg/h	3,9
6	Consumption of combustion air		m3/h	36
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	11,9
9	Weight		kg	350
10	Required min. cross section for circulating air - INPUT		cm^2	375
11	Required min. cross section for circulating air - OUTPUT		cm^2	600
12	Three-component insulated chimney - active height 6 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Rear feeding door (DPS,DPSO)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 100 VD 1070/450,510,570

Range 100

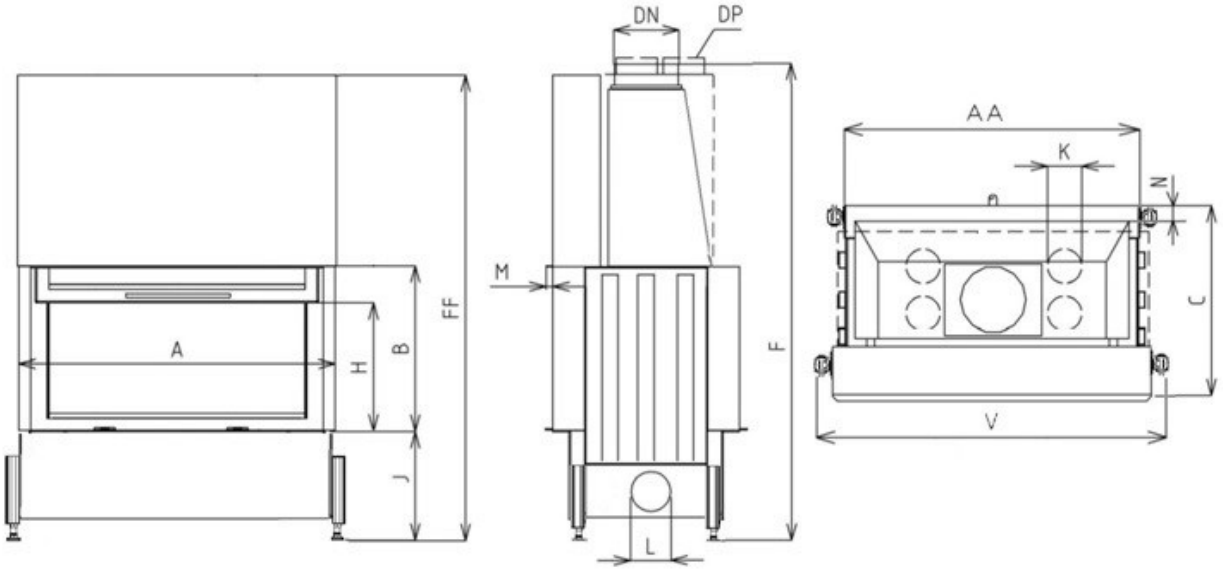


combustion air inlet

	Sizes		CHOPOK O 100 VD 1070/450	CHOPOK O 100 VD 1070/510	CHOPOK O 100 VD 1070/570
1	A	mm	1070		
2	F	mm	1350	1410	1470
3	C	mm	620		
4	DN	Ø mm	200		
5	B	mm	450	510	570
6	FF	mm	1350	1470	1590
7	V	mm	1180		
8	AA	mm	1000		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	150		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

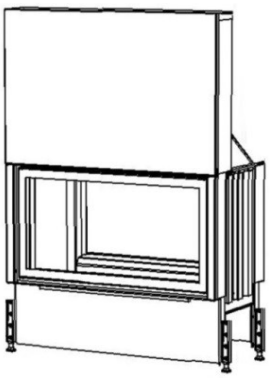

	Technical parameters			
1	Nominal heat output		kW	13,5
2	Pressure required		Pa	12
3	Average efficiency		%	78,9
4	Average flue gas temperature		°C	263
5	Wood consuption		kg/h	4,3
6	Consumption of combustion air		m3/h	41
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	13,6
9	Weight		kg	370
10	Required min. cross section for circulating air - INPUT		cm^2	425
11	Required min. cross section for circulating air - OUTPUT		cm^2	675
12	Three-component insulated chimney - active height 7 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 110 VD 1170/450,510,570

Range 110

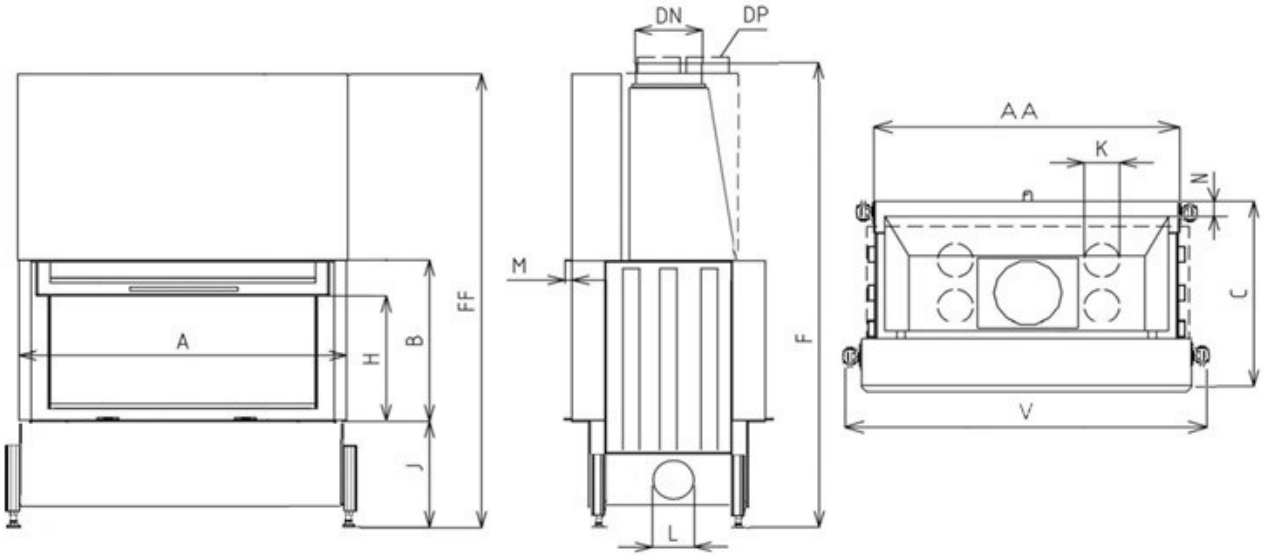


combustion air inlet

	Sizes		CHOPOK O 110 VD 1170/450	CHOPOK O 110 VD 1170/510	CHOPOK O 110 VD 1170/570
1	A	mm	1170		
2	F	mm	1410	1470	1530
3	C	mm	620		
4	DN	Ø mm	225		
5	B	mm	450	510	570
6	FF	mm	1410	1530	1650
7	V	mm	1280		
8	AA	mm	1100		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	150		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

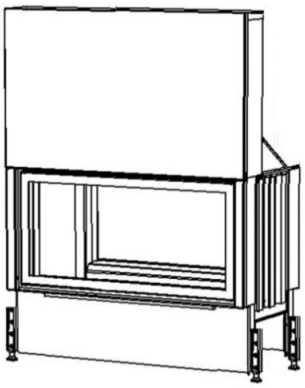

	Technical parameters			
1	Nominal heat output		kW	15,0
2	Pressure required		Pa	12
3	Average efficiency		%	79,3
4	Average flue gas temperature		°C	256
5	Wood consuption		kg/h	4,7
6	Consumption of combustion air		m3/h	45
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	13,3
9	Weight		kg	400
10	Required min. cross section for circulating air - INPUT		cm^2	450
11	Required min. cross section for circulating air - OUTPUT		cm^2	750
12	Three-component insulated chimney - active height 7 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 120 VD 1270/450,510,570


Range 120

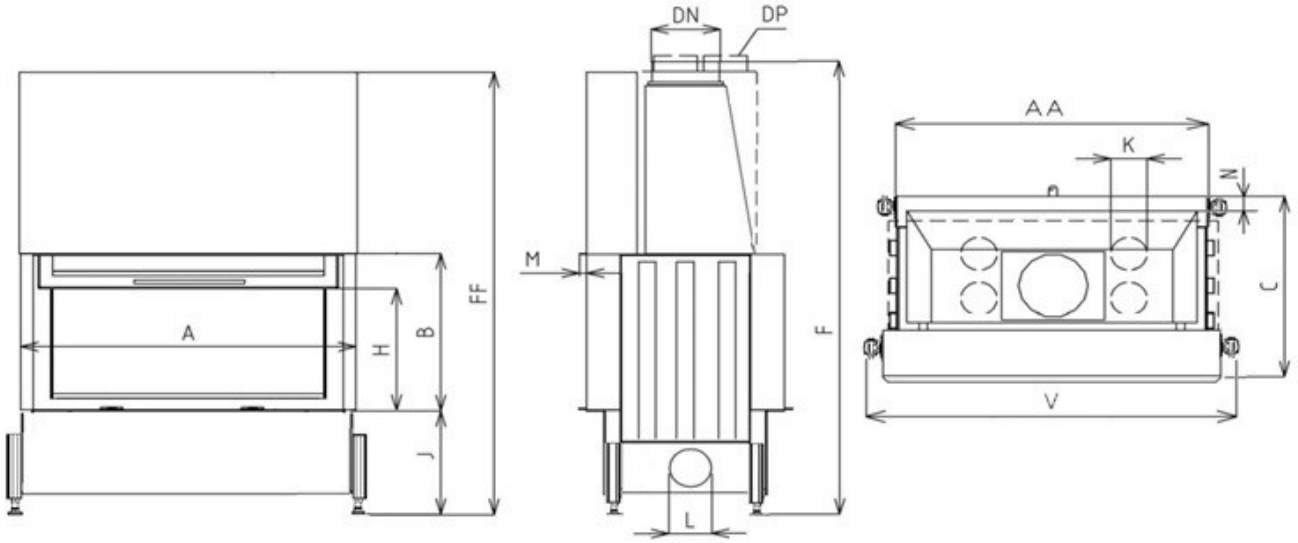

	Sizes		CHOPOK O 120 VD 1270/450	CHOPOK O 120 VD 1270/510	CHOPOK O 120 VD 1270/570
1	A	mm	1270		
2	F	mm	1410	1470	1530
3	C	mm	620		
4	DN	Ø mm	225		
5	B	mm	450	510	570
6	FF	mm	1410	1530	1650
7	V	mm	1380		
8	AA	mm	1200		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	2x125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

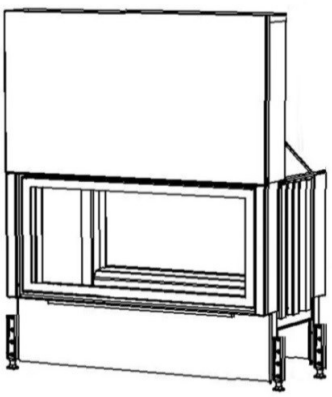

	Technical parameters			
1	Nominal heat output		kW	16,5
2	Pressure required		Pa	12
3	Average efficiency		%	79,7
4	Average flue gas temperature		°C	248
5	Wood consuption		kg/h	5,1
6	Consumption of combustion air		m3/h	50
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	17
9	Weight		kg	430
10	Required min. cross section for circulating air - INPUT		cm^2	500
11	Required min. cross section for circulating air - OUTPUT		cm^2	825
12	Three-component insulated chimney - active height 7 m		Ø cm	200
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)


Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk

CHOPOK O 130 VD 1370/450,510,570


Range 130

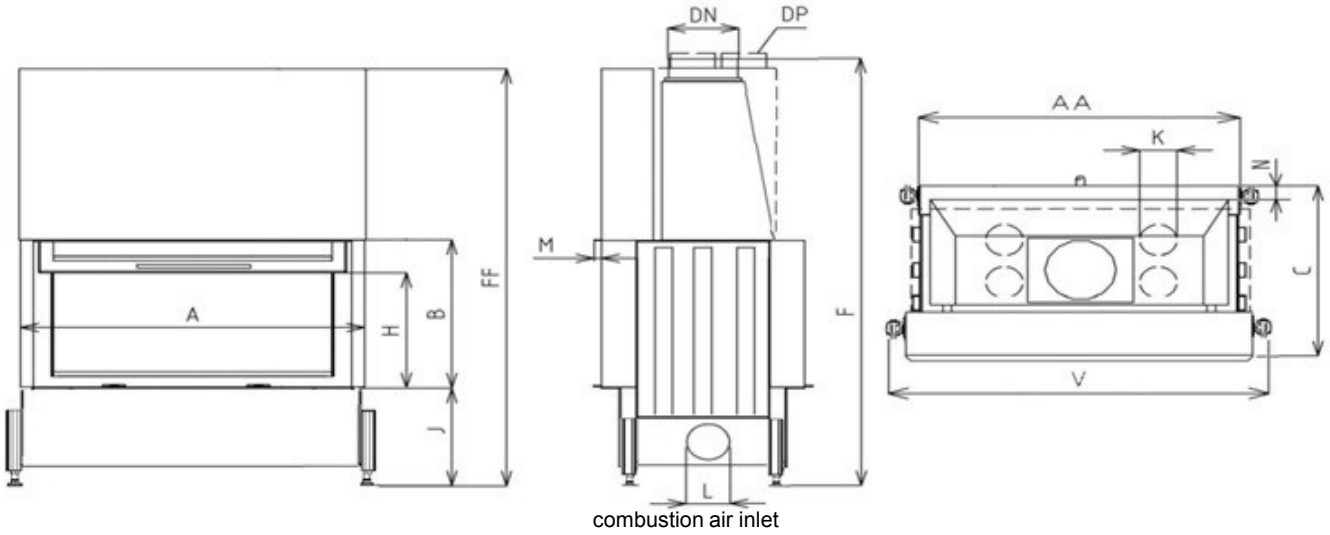

	Sizes		CHOPOK O 130 VD 1370/450	CHOPOK O 130 VD 1370/510	CHOPOK O 130 VD 1370/570
1	A	mm	1370		
2	F	mm	1410	1470	1530
3	C	mm	620		
4	DN	Ø mm	225		
5	B	mm	450	510	570
6	FF	mm	1410	1530	1650
7	V	mm	1480		
8	AA	mm	1300		
9	H	mm	315	375	435
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	2x125		
13	M	mm	20		
14	N	mm	50		

Basic design:

External air inlet
Segment chamotte lining (SO)
Glass Classic
Inox control grip-handle MP2, RP2
1 x VD, 1 x LD
Enviromentally friendly varnish

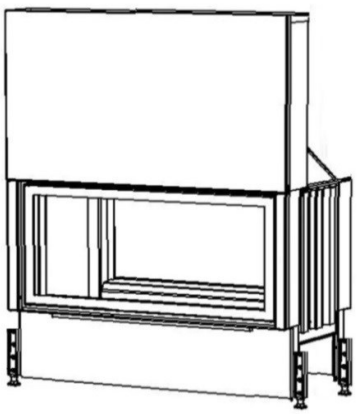

	Technical parameters			
1	Nominal heat output		kW	18,0
2	Pressure required		Pa	12
3	Average efficiency		%	80,1
4	Average flue gas temperature		°C	240
5	Wood consuption		kg/h	5,5
6	Consumption of combustion air		m3/h	54
7	Emission of CO to 13% O2		%	0,1
8	Flue gas mass flow		g/s	18,7
9	Weight		kg	470
10	Required min. cross section for circulating air - INPUT		cm^2	550
11	Required min. cross section for circulating air - OUTPUT		cm^2	900
12	Three-component insulated chimney - active height 7 m		Ø cm	250
13	Character of building const-ruction with fireplace insert	warm air convection		Yes
		heat storage without conv		No

Optional accessories:

Cover frame (KR)
Glass Reflex (SR)
Black printed glass(SM)
Black printed glass Reflex (SMR)
External ashtray (VOP)
Lower hearth (ZO)
Convectional casing (DP)
Vertical heat-storing panel (AZ)
Lift up door (2 x VD)

Test Method: ČSN EN 1322/A2:2007, FprEN16510-1, FprEN16510-2-2

Fireplace complies with the requirements: EN 13229, DIN +, BImSchV-Stufe 2,Commission Regulation (EU) č. 2015/1185Ecodesign requirements

KOBOK reserves the right to change dimensions and parameters described in these sheets. The current edition can be downloaded from www.KOBOK.sk