Assembly instructions

BKH Panorama series 5.0
Suspended carrier unit

©2025

BRUNNER®

CONTENTS

1 BKH Panorama series 5.0 Suspended carrier unit.....1
2 Components.....3
2.1 Additional option: Raising of the support bracket.....6
3 Assembly.....7
4 Dimensions..... 16


 © 2025 Brunner GmbH

2 COMPONENTS

Suspended carrier unit complete

Variant BKH Panorama	Item no.
45-45-45-45	HK050430
45-65-45-65	HK051430
45-80-45-80	HK052430
45-35-60-35	HK053430
45-35-90-35	HK054430
45-35-120-35	HK055430


Support plate

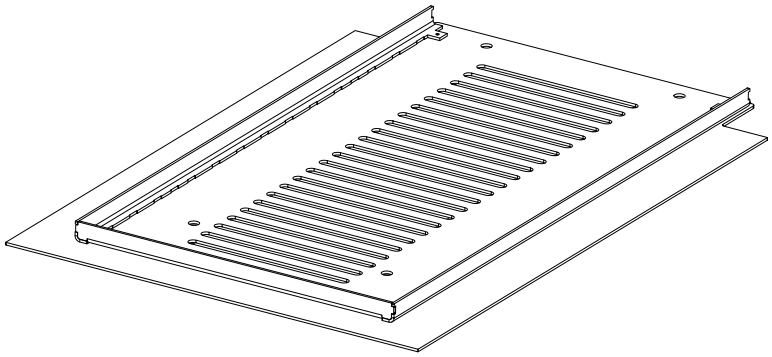

Im. 1: Support plate (schematic representation)

Variant BKH Panorama	Item no.
45-45-45-45	HK050397
45-65-45-65	HK051420
45-80-45-80	HK052420
45-35-60-35	HK053420
45-35-90-35	HK054420
45-35-120-35	HK055410


Suspended support bracket (HK000820)

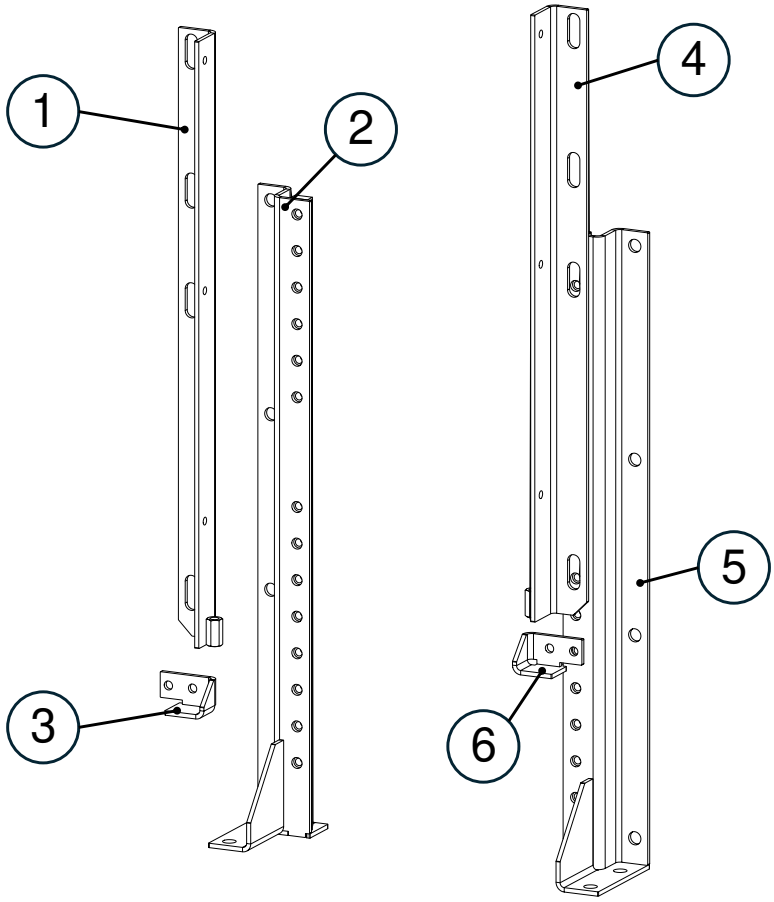

Position	Designation	Item no.	Pcs.
1	Support bracket appliance left	HK000860	1
2	Support bracket left	HK000840	1
3	Support set screw left	HK000822	1
4	Support bracket appliance right	HK000850	1
5	Support bracket right	HK000830	1
6	Support set screw right	HK000821	1

 © 2025 Brunner GmbH

Accessory pack (HK000870)

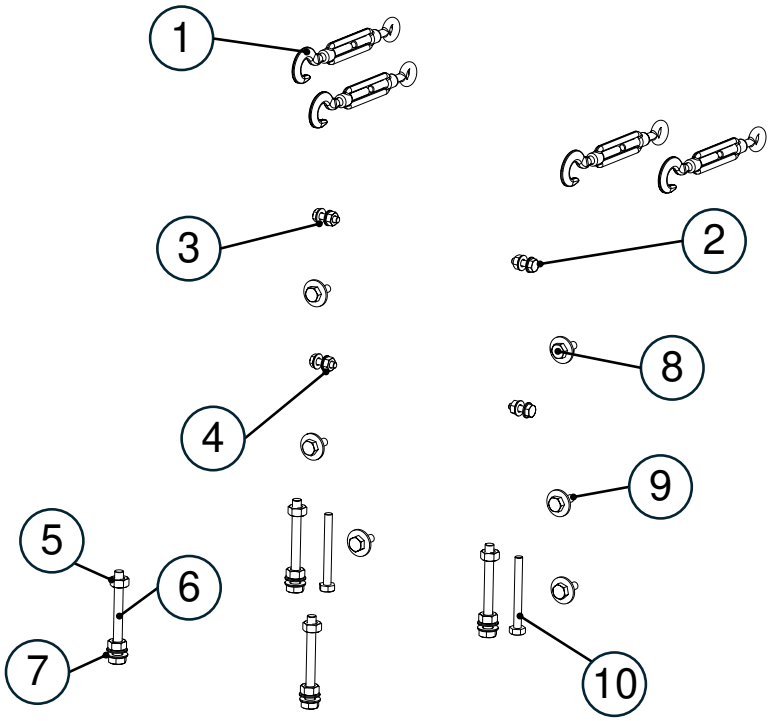


Position	Designation	Item no.	Pcs.
1	Turnbuckle with hook and eye	02567	4
2	Hexagon head screw M10x30	800420	4
3	Washer	800140	8
4	Hexagon nut	800454	4
5	Hexagon nut	800714	8
6	Hexagon head screw M14x120	800713	4
7	Washer	800715	8
8	Hexagon head screw M12x30	800098	6
9	Washer	800850	6
10	Hexagon head screw M12x100	800712	2

© 2025 Brunner GmbH

2.1 ADDITIONAL OPTION: RAISING OF THE SUPPORT BRACKET

HK000880

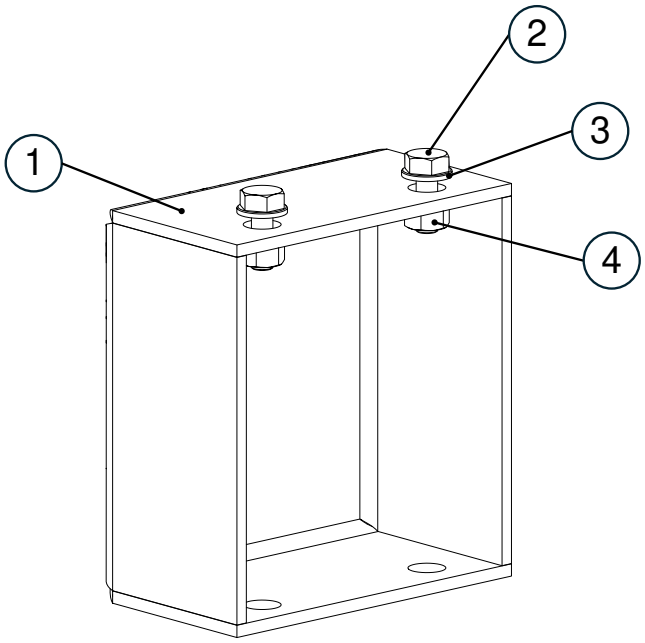


Position	Designation	Item no.	Pcs.
1	Bracket raise	HK000881	2
2	Hexagon head screw M12x30	800420	4
3	Washer	00934	8
4	Hexagon nut	800422	4

As an additional option, the raised bracket allows the height to be increased by 200 mm in order to realize modern systems with a fire table height of 650 mm to the floor edge.

 © 2025 Brunner GmbH

3 ASSEMBLY

Suspended carrier unit installed in the BKH Panorama (schematic diagram)

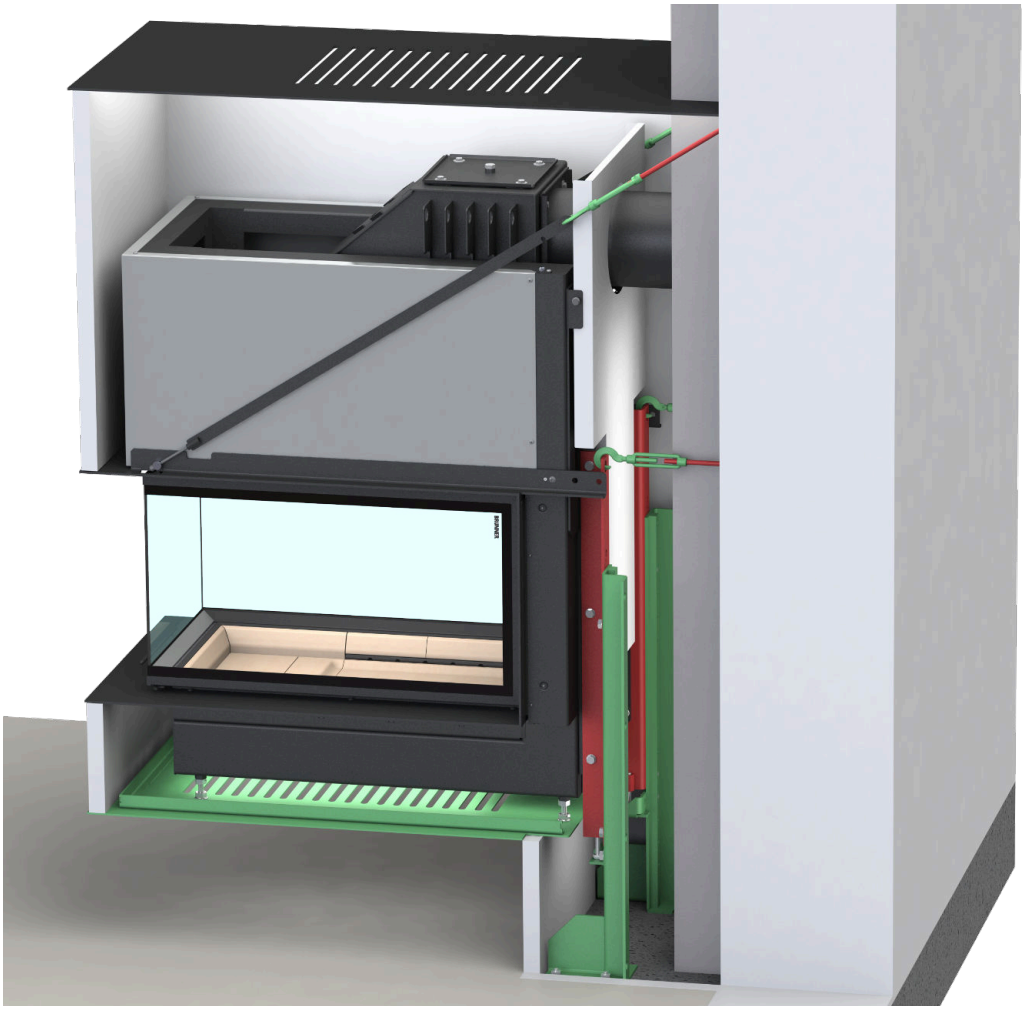


Im. 2: Illustration of support bracket (red); support plate and carrier unit with floor fixing (green)

Vorbereitung der Montage

To install the suspended carrier unit, the Panorama fireplace must be raised.


Abhängig von der Panorama-Variante und der Einbausituation vor Ort können hierfür geeignete Gurte an zwei Positionen am Kamin angebracht werden:

Seitliche Rippen Stahlhaube

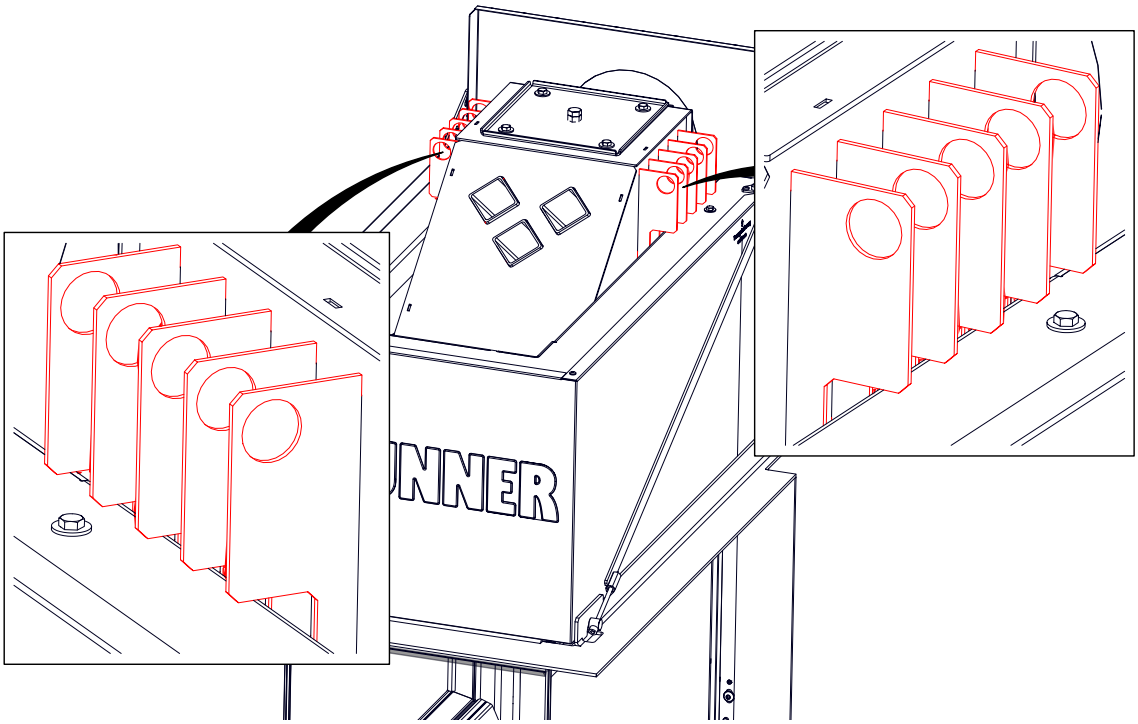

 © 2025 Brunner GmbH

Vierkant-Wärmetauscherrohre

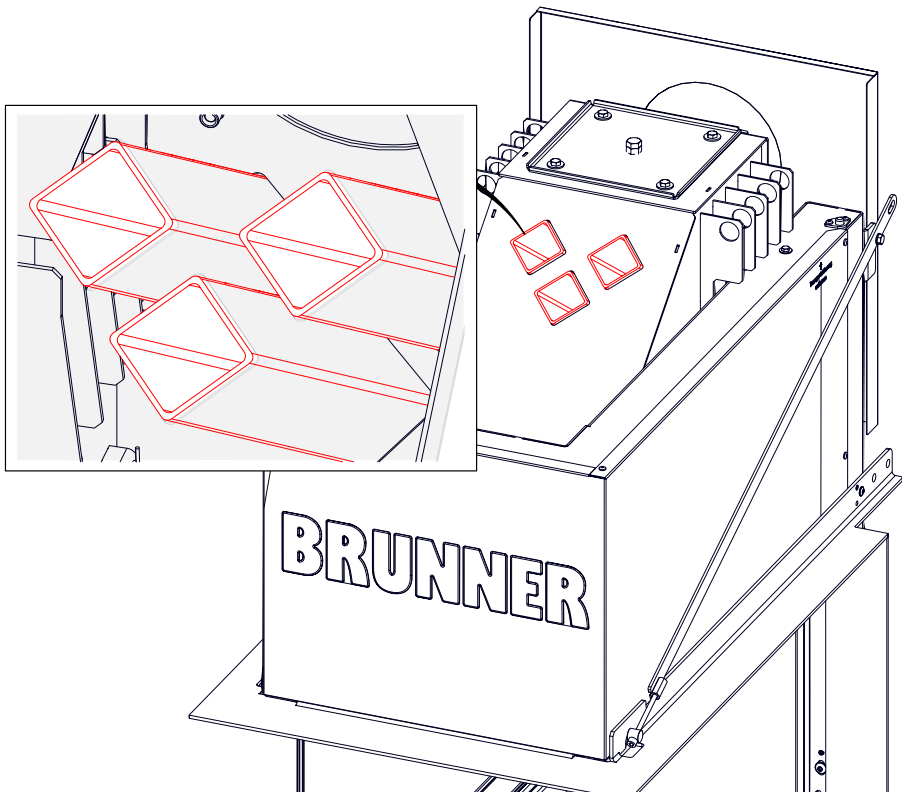

Den Panorama-Kamin anschließend mit einem Montagekran anheben.

⚠ CAUTION

Risk of injury due to heavy loads


Lifting and moving the Panorama fireplace can cause crushing injuries.

- ► Panorama-Kamin nur mit einem geeigneten Gerät der Förder- bzw. Hebetechnik heben und bewegen (z.B. Montagekran).
- ► When lifting the panoramic fireplace, ensure that it is properly secured.


Work steps

1. Mount the support bracket

► Fit the support bracket to the retaining plate at the rear using 3x hexagon head screw M10x30.

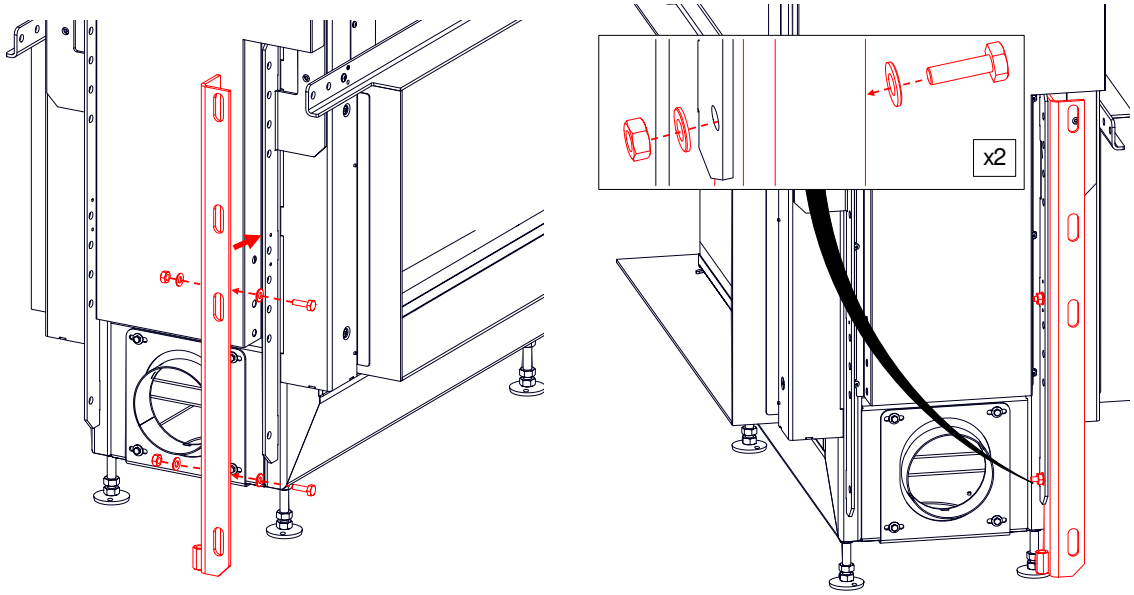

► Assembly on both sides.

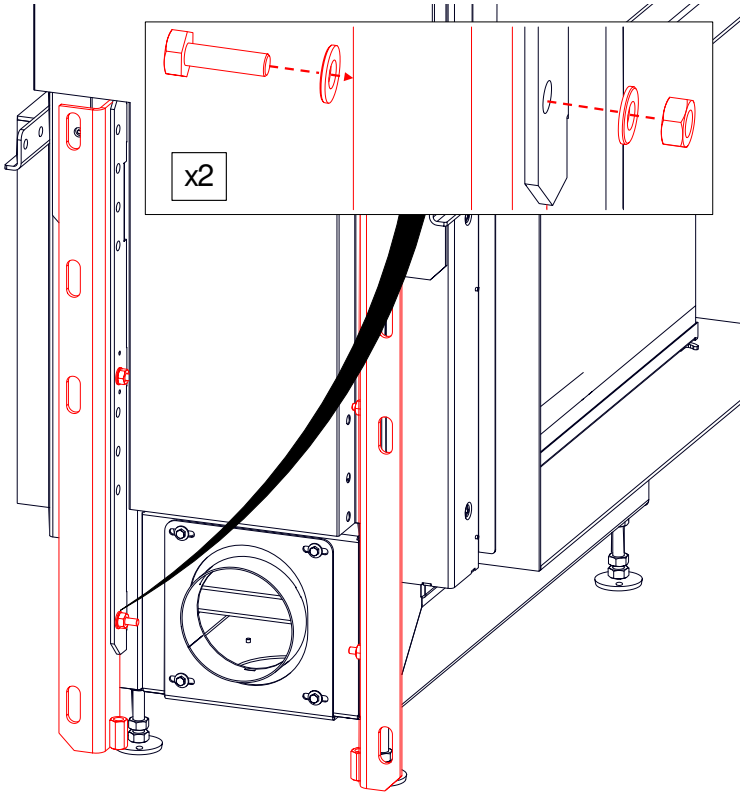


 © 2025 Brunner GmbH

2. Mount the support units


► Place support units with floor fixings in the installation position.


► Lift the panorama fireplace with the assembly crane. Set the desired height using the hole grid with slotted holes on the support bracket on the appliance.

Additional option: Optional floor plinth on both sides (HK000880) to increase the height

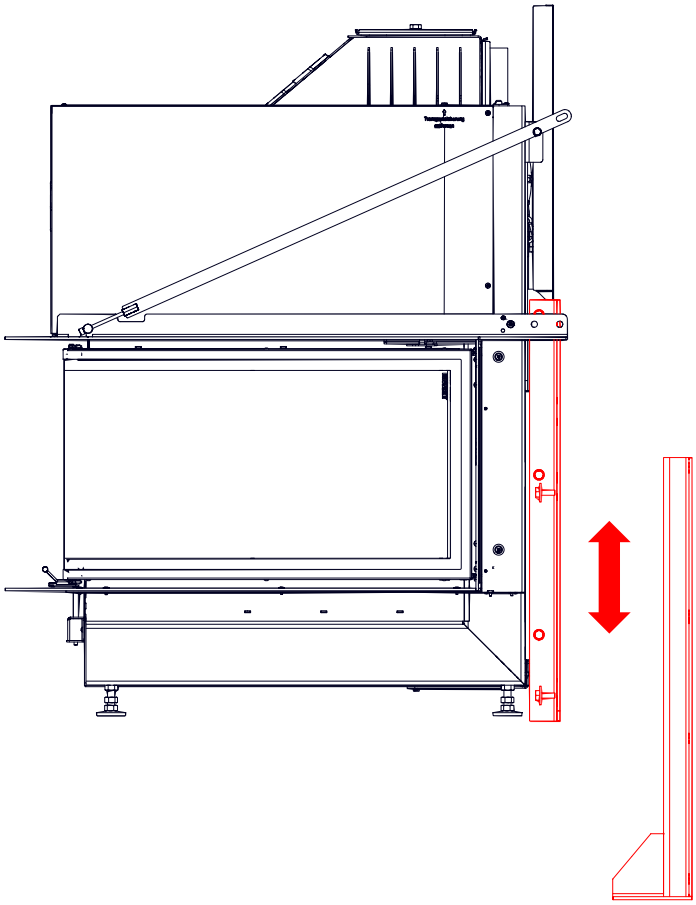


► Mount the support bracket to the support unit using 2x hexagon head screw M12x30.

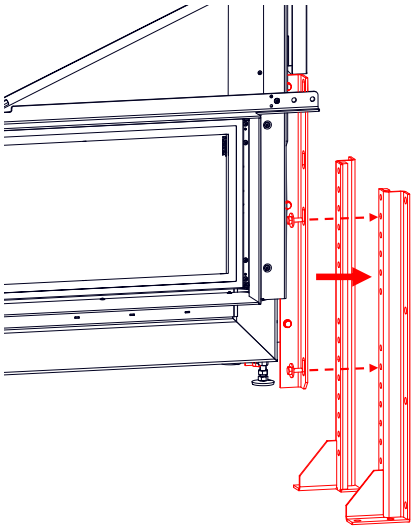

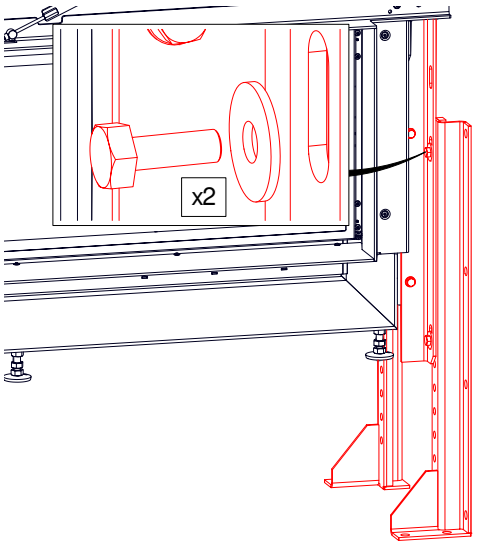


► Assembly on both sides.

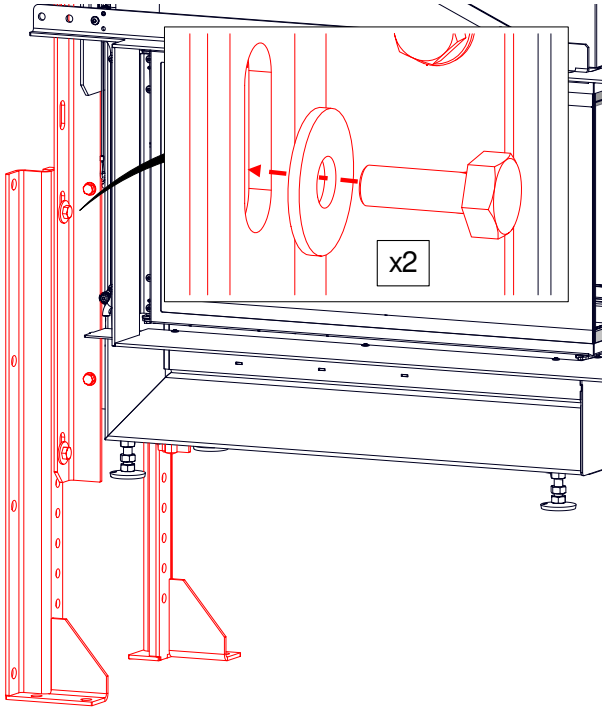

 © 2025 Brunner GmbH


► Mit den Stellschrauben M12x100 die Höhe zum Boden und leichte Winkelfehler ausrichten.

► Anschließend Auflager für Stellschrauben mit Sechskantschraube M12x30 auf beiden Seiten montieren.

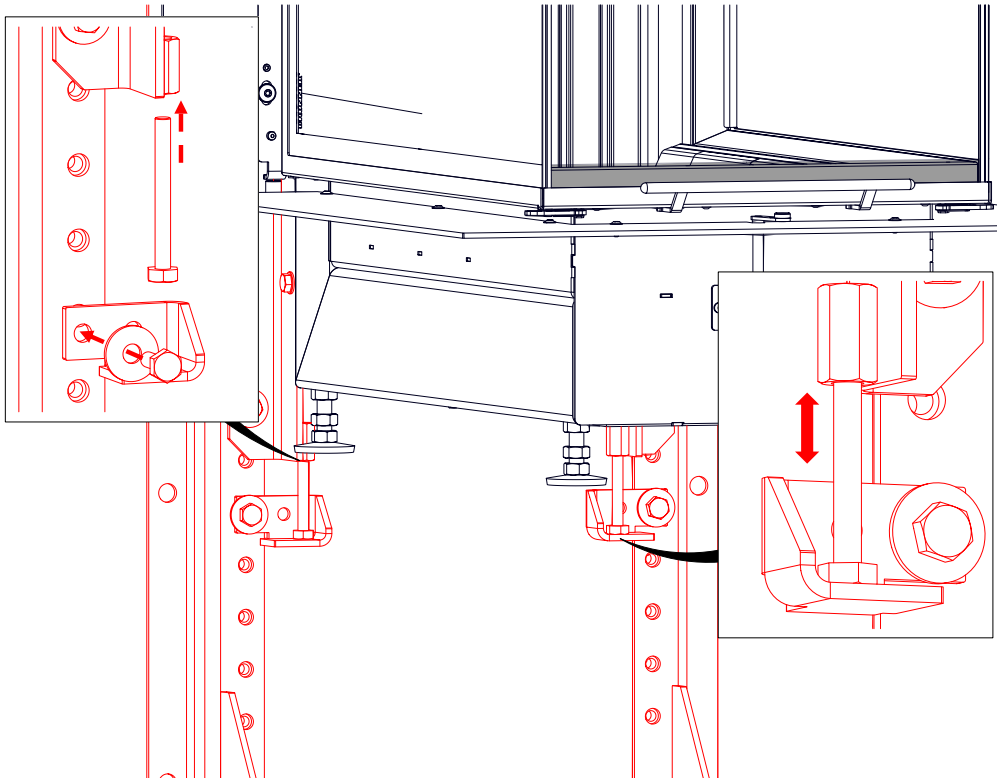


3. fix the support unit in a floating position

► Attach turnbuckles with hooks on both sides to the support bracket and fasten to the installation wall.

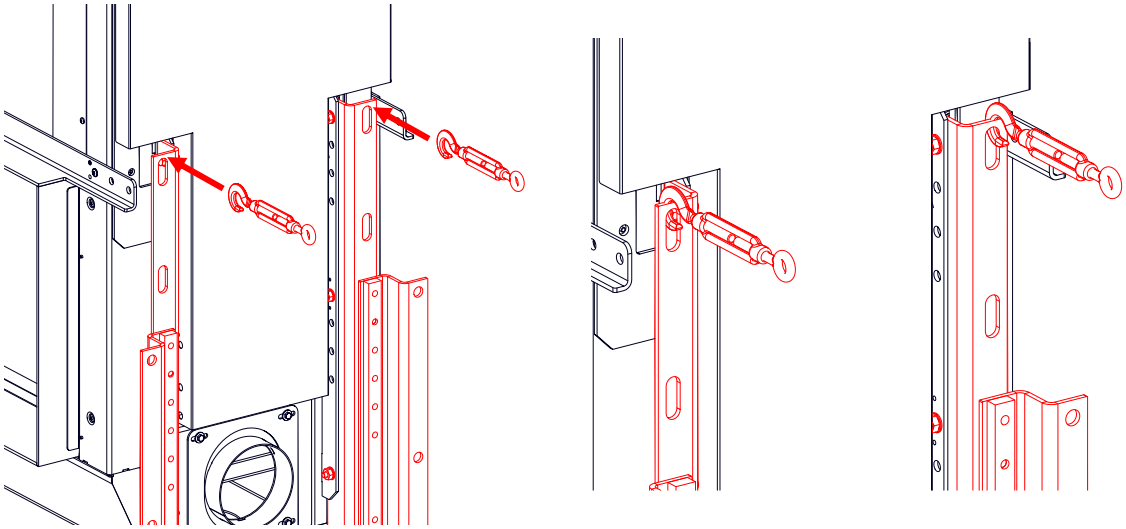

► Fasten the floor fastenings of the support units to the unfinished floor.


Fasten the floor fastenings with suitable heavy-duty anchors M16 (**not** included as standard).

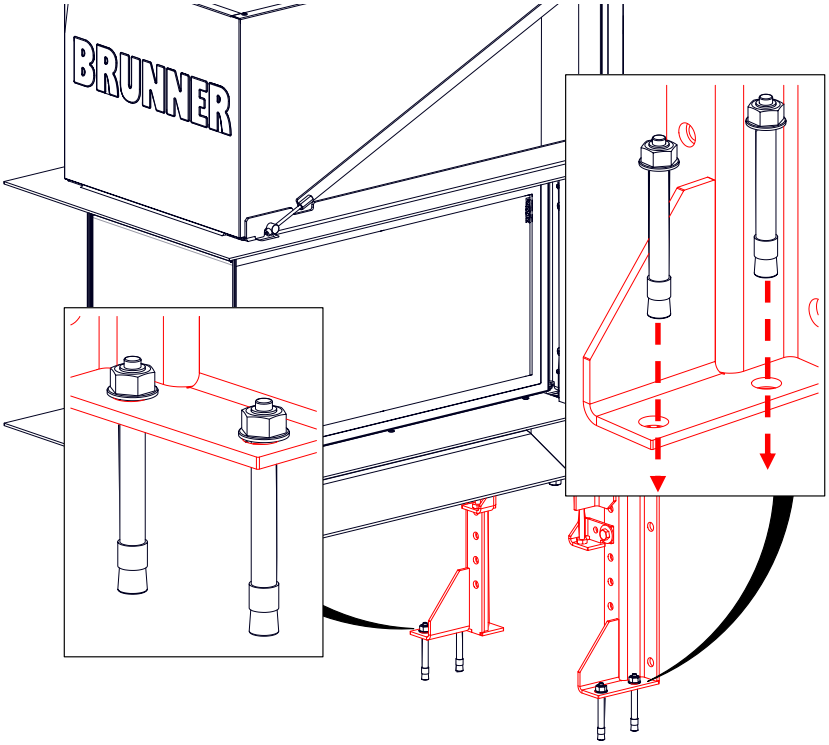

 © 2025 Brunner GmbH


4. mount the support plate

► Remove the adjustable feet on the underside of the panorama fireplace.

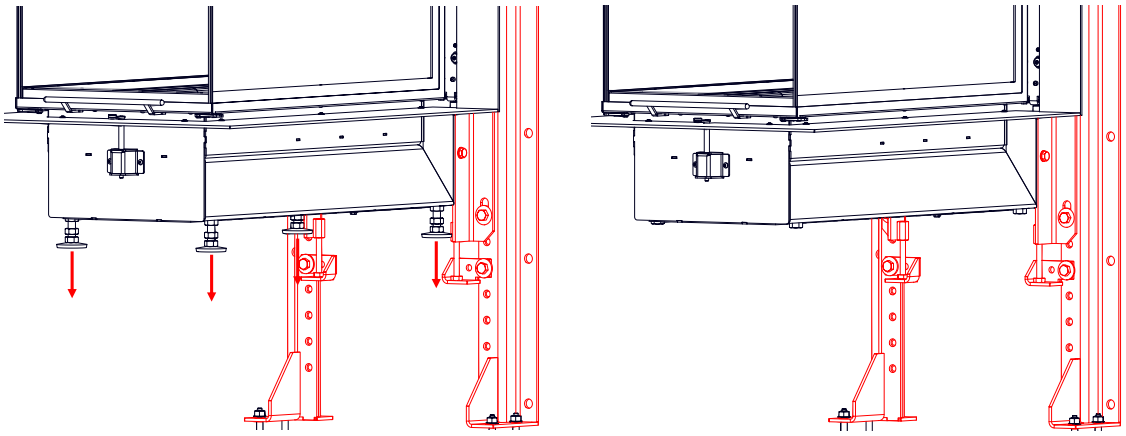


► Mount the support plate to the underside of the panoramic fireplace using 4x hexagon head screw M14x120.

Set the desired distance between the fire table and the support plate.

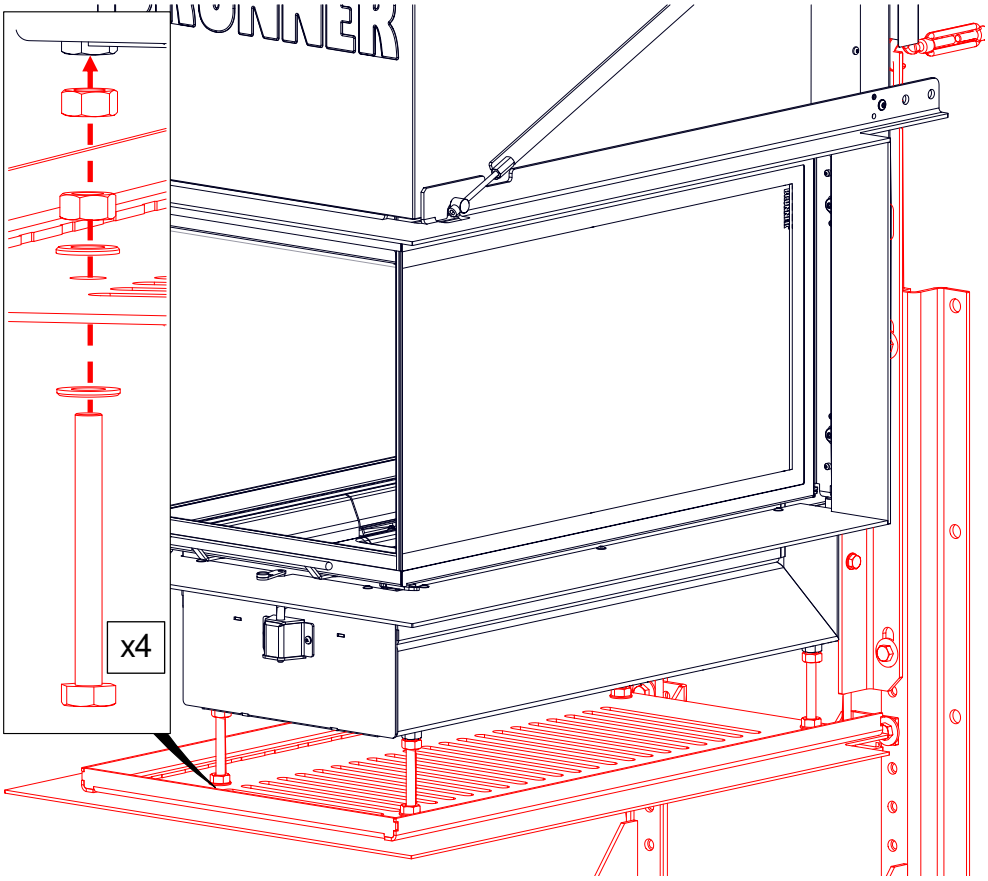

4 DIMENSIONS

Support plate

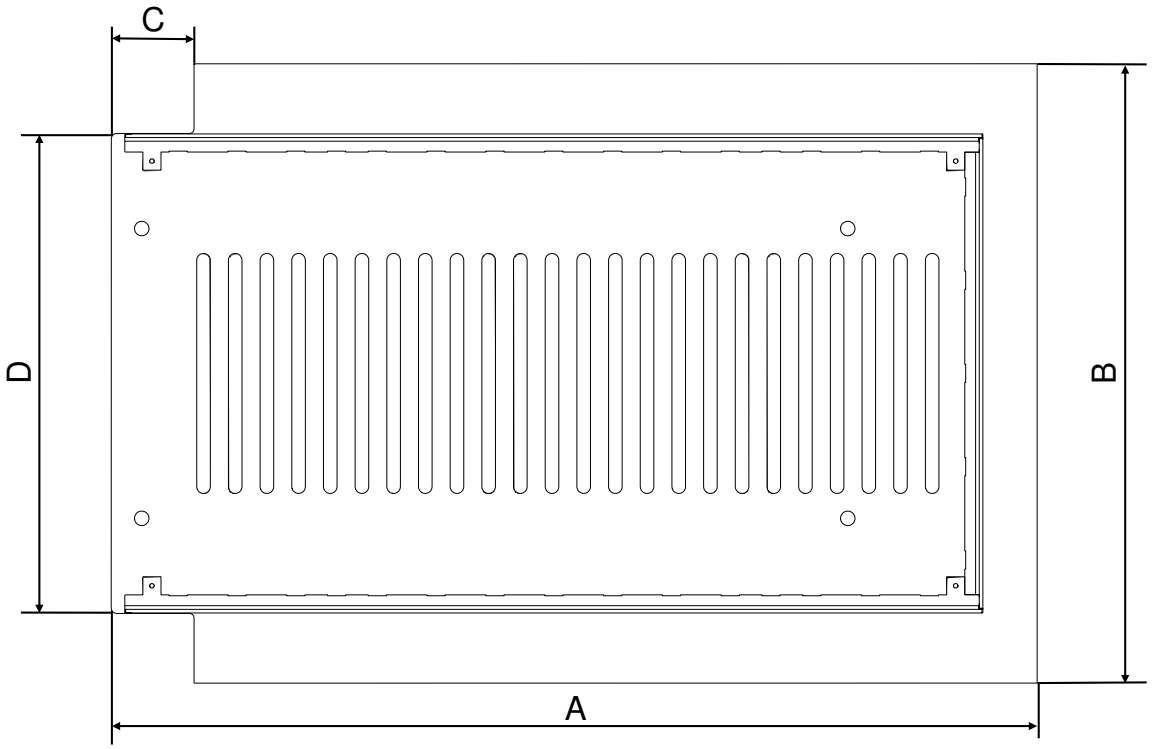


Im. 3: Support plate (schematic diagram)


	45-45-45-45	45-65-45-65	45-80-45-80	45-35-60-35	45-35-90-35	45-35-120-35
A	673	873	1023	573	573	573
B	684	684	684	834	1134	1434
C	91,5	91,5	91,5	91,5	91,5	91,5
D	530	530	530	680	980	1280


 © 2025 Brunner GmbH

Support unit with floor mounting

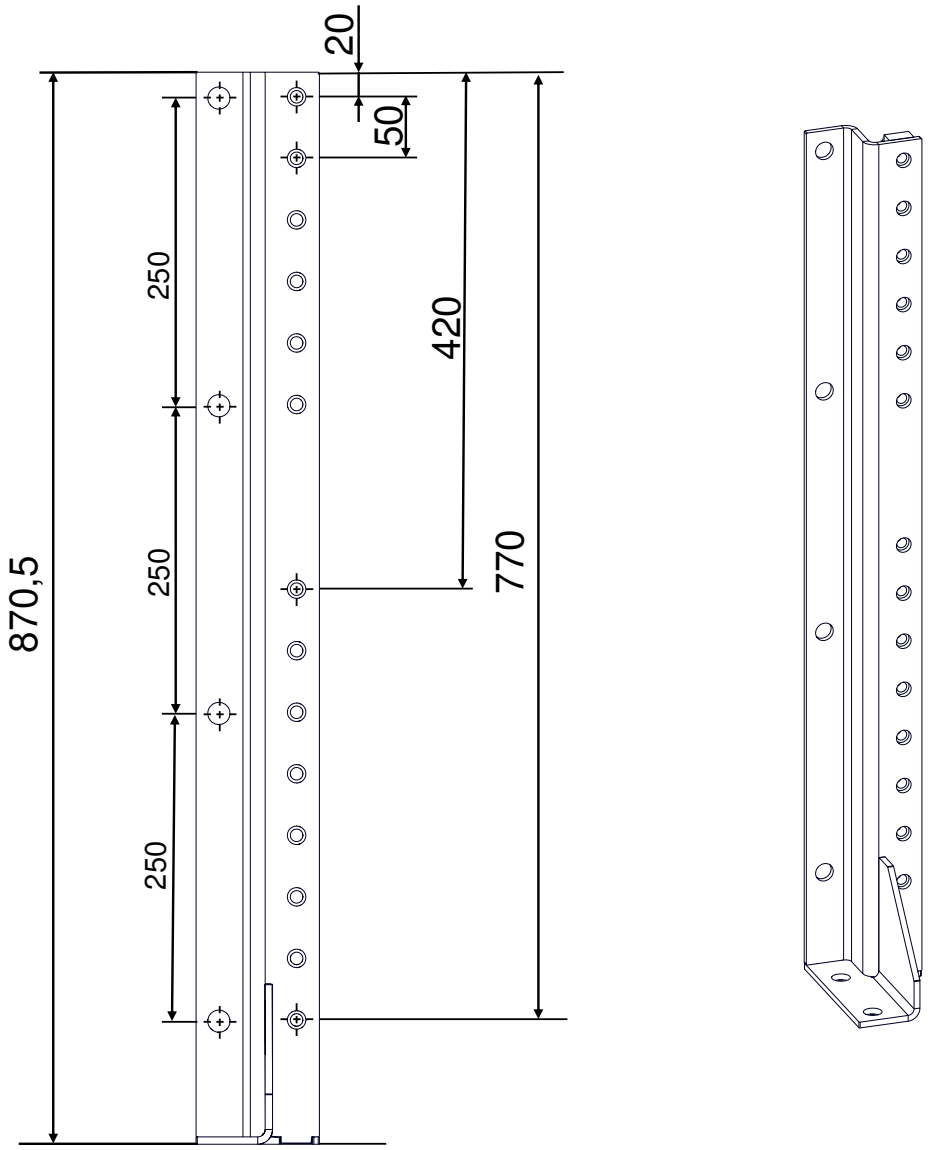



Support bracket

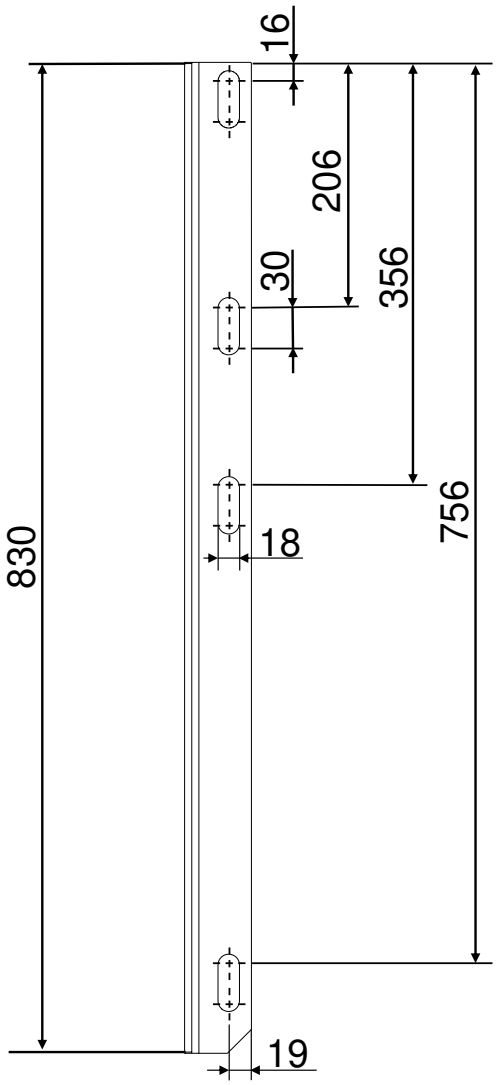



Floor base (optional)

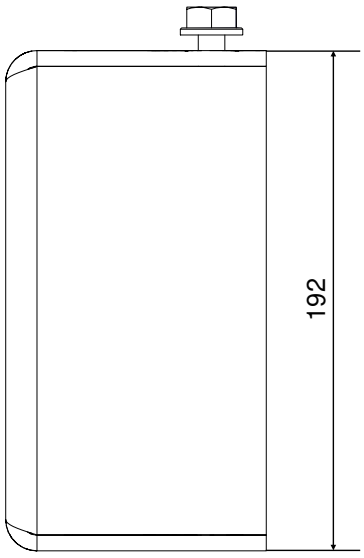

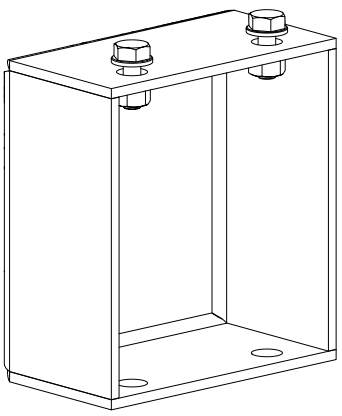

 © 2025 Brunner GmbH

Ulrich Brunner GmbH
Zellhuber Ring 17-18
D-84307 Eggenfelden
Tel.: +49 (0) 8721/771-0 / Fax: +49 (0) 8721/771-100
Email: info@brunner.de

Technical and assortment changes as well as errors and misprints reserved.
Reprinting and reproduction, even in part, only with the express permission of the publisher.

Art.-Nr.: 203091